

IBM[®] DB2[®] Universal Database



SQL Getting Started

Version 7

IBM[®] DB2[®] Universal Database



SQL Getting Started

Version 7

Before using this information and the product it supports, be sure to read the general information under "Appendix C. Notices" on page 111.

This document contains proprietary information of IBM. It is provided under a license agreement and is protected by copyright law. The information contained in this publication does not include any product warranties, and any statements provided in this manual should not be interpreted as such.

Order publications through your IBM representative or the IBM branch office serving your locality or by calling 1-800-879-2755 in the United States or 1-800-IBM-4YOU in Canada.

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© **Copyright International Business Machines Corporation 1993, 2000. All rights reserved.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Welcome	v	Scalar Fullselects	33
Related Documentation for This Book	v	Casting Data Types	33
Highlighting Conventions	v	Case Expressions	34
Chapter 1. Relational Databases and SQL	1	Table Expressions	35
Chapter 2. Organizing Data	3	Nested Table Expressions	36
Tables	3	Common Table Expressions	36
Views	4	Correlation Names	38
Schemas	4	Correlated Subqueries	39
Data Types	5	Implementing a Correlated Subquery	41
Chapter 3. Creating Tables and Views	9	Chapter 6. Using Operators and Predicates	
Creating Tables	9	in Queries	45
Inserting Data	10	Combining Queries by Set Operators	45
Changing Data	12	UNION Operator	45
Deleting Data	12	EXCEPT Operator	46
Creating Views	13	INTERSECT operator	47
Using Views to Manipulate Data	15	Predicates	48
Chapter 4. Using SQL Statements to		Using the IN Predicate	48
Access Data	17	Using the BETWEEN Predicate	48
Connecting to a Database	18	Using the LIKE Predicate	49
Investigating Errors	18	Using the EXISTS Predicate	49
Selecting Columns	19	Quantified Predicates	50
Selecting Rows	20	Chapter 7. Advanced SQL	51
Sorting Rows	22	Enforcing Business Rules with Constraints	
Removing Duplicate Rows	24	and Triggers	51
Order of Operations	24	Keys	51
Using Expressions to Calculate Values	25	Unique Constraints	52
Naming Expressions	25	Referential Integrity Constraints	52
Selecting Data from More Than One Table	26	Table Check Constraints	53
Using a Subquery	27	Triggers	54
Using Functions	28	Joins	58
Column Functions	28	Complex Queries	62
Scalar Functions	29	ROLLUP and CUBE Queries	62
Table Functions	30	Recursive Queries	63
Grouping	30	OLAP Functions	63
Using a WHERE Clause with a GROUP BY		Chapter 8. Customizing and Enhancing	
Clause	31	Data Manipulation	65
Using the HAVING Clause After the		User-Defined Types	65
GROUP BY Clause	32	User-Defined Functions	66
Chapter 5. Expressions and Subqueries	33	Large Objects (LOBs)	67
		Manipulating Large Objects (LOBs)	67
		Special Registers	68
		Introduction to Catalog Views	69

Selecting Rows from System Catalogs	69	Adamson Resume	87
Appendix A. Sample Database Tables	71	Walker Photo	88
The Sample Database	72	Walker Resume	89
To Create the Sample Database.	72	Appendix B. Using the DB2 Library	91
To Erase the Sample Database	72	DB2 PDF Files and Printed Books	91
CL_SCHED Table	72	DB2 Information	91
DEPARTMENT Table	73	Printing the PDF Books	100
EMPLOYEE Table	73	Ordering the Printed Books	101
EMP_ACT Table	76	DB2 Online Documentation	102
EMP_PHOTO Table	78	Accessing Online Help	102
EMP_RESUME Table	78	Viewing Information Online	104
IN_TRAY Table	79	Using DB2 Wizards	107
ORG Table	79	Setting Up a Document Server	108
PROJECT Table	80	Searching Information Online	108
SALES Table	81	Appendix C. Notices	111
STAFF Table	82	Trademarks	114
STAFFG Table	83	Index.	117
Sample Files with BLOB and CLOB Data		Contacting IBM	121
Type	84	Product Information	121
Quintana Photo	84		
Quintana Resume	84		
Nicholls Photo	85		
Nicholls Resume	86		
Adamson Photo.	87		

Welcome

This book is intended to introduce users to Structured Query Language (SQL) and relational databases. It will:

- Discuss basic concepts of SQL used in the DB2 product.
- Explain how to perform database manipulation tasks.
- Demonstrate tasks through simple examples.

If you are the system administrator, before you try out any of the examples in this book, you should:

- Install and configure the server as outlined in the *Quick Beginnings* book for your operating system. Create the SAMPLE database using the "First Steps" option. The SAMPLE database can also be created from a command line prompt. See the *SQL Reference* for details. Note: Do not put your own data into the DB2 SAMPLE database.
- Create the DB2 administrator user ID by following the instructions in the *Quick Beginnings* book.

If you are not the system administrator, ensure that you have a valid user ID and the appropriate authority and privileges to access the SAMPLE database.

Related Documentation for This Book

You may find the following publications useful:

<i>Quick Beginnings</i>	Contains information required to install and use the database manager.
<i>SQL Reference</i>	Contains SQL reference information.
<i>Administration Guide</i>	Contains information required to design, implement, and maintain a database to be accessed either locally or in a client/server environment.
<i>Application Development Guide</i>	Discusses the application development process and how to code, compile, and execute application programs that use embedded SQL to access the database, or run as DB2 stored procedures using the SQL Procedure language (or other supported programming languages).

Highlighting Conventions

The following conventions are used in this book.

Bold	In examples, it indicates commands and keywords predefined by the system.
-------------	---

<i>Italics</i>	Indicates one of the following: <ul style="list-style-type: none">• The introduction of a new term• A reference to another source of information.
UPPERCASE	Indicates one of the following: <ul style="list-style-type: none">• Commands and keywords predefined by the system• Examples of specific data values or column names.

Chapter 1. Relational Databases and SQL

In a *relational database*, data is stored in *tables*. A table is a collection of *rows* and *columns*. See Figure 1 on page 3 for a graphical example of a table. Columns (vertical) and rows (horizontal) have been marked on the figure. *Structured Query Language (SQL)* is used to retrieve or update data by specifying columns, tables and the various relationships between them.

SQL is a standardized language for defining and manipulating data in a relational database. SQL statements are executed by a *database manager*. A database manager is a computer program that manages the data.

A *partitioned* relational database is a relational database where the data is managed across multiple partitions (also called *nodes*). A simple way to think of partitions is to consider each partition as a physical computer. In this book, we will focus our attention on single partition databases.

You can access the sample database and try out all the examples in this book through *interactive SQL* by using an interface such as the Command Line Processor (CLP) or the Command Center (CC).

Chapter 2. Organizing Data

This chapter presents important conceptual descriptions of *tables*, *views* and *schemas*. It is a general overview showing the connection between different building blocks of a relational database. The last section provides a brief discussion of some of the important and more commonly used data types.

Tables

Tables are logical structures made up of a defined number of *columns* and a variable number of *rows*. A column is a set of values of the same data type. A row is a sequence of values composing a single record in the table. The rows are not necessarily ordered within a table. To order the result set, you have to explicitly specify ordering in the SQL statement which selects data from the table. At the intersection of every column and row is a specific data item called a *value*. In Figure 1, 'Sanders' is an example of a value in the table.

A *base table* holds user data and is created with the CREATE TABLE statement. A *result table* is a set of rows that the database manager selects or generates from one or more base tables to satisfy a query.

Figure 1 illustrates a section of a table. Columns and rows have been marked.

	ID	NAME	DEPT	J
Row {	10	Sanders	20	Mg
	20	Pernal	20	Sa
	30	Marenghi	38	Mg
	40	O'Brien	38	Sa
	50	Hanes	15	Mg
	60	Quigley	38	Sa
			15	Sa

Figure 1. Visualization of a Table

Views

A *view* provides an alternate way of looking at the data in one or more tables. It is a dynamic window on tables.

Views allow multiple users to see different presentations of the same data. For example, several users may be accessing a table of data about employees. A manager sees data about his or her employees but not employees in another department. A recruitment officer sees the hiredates of all employees, but not their salaries, while a financial officer sees the salaries, but not the hiredates. Each of these users operates with a view derived from the real table. Each view appears to be a table and has its own name.

An advantage of using views is that you can use them to control access to sensitive data. So, different people can have access to different columns or rows of the data.

Schemas

A *schema* is a collection of named objects (tables and views, for example). A schema provides a logical classification of objects in the database.

A schema is created implicitly when you create a table, a view or any other named object. Or, you can create it explicitly using the CREATE SCHEMA statement.

When you create a named object, you can *qualify* (associate) its name with the name of the particular schema. Named objects have two-part names, where the first part of the name is the schema name to which the object is assigned. If you do not specify a schema name, the object is assigned to the default schema. (The name of the default schema is the *authorization ID* of the user executing the statement.)

For interactive SQL, the method used to execute the examples in this book, the authorization ID is the user ID specified with the CONNECT statement. For example, if the name of a table is STAFF, and the user ID specified is USERXYZ, then the qualified table name is USERXYZ.STAFF. See “Connecting to a Database” on page 18 for details on the CONNECT statement.

Some schema names are reserved. For example, *built-in functions* are in the SYSIBM schema while the preinstalled *user-defined functions* belong to the SYSFUN schema. Refer to the *SQL Reference* for details on the CREATE SCHEMA statement.

Data Types

Data types define acceptable values for constants, columns, host variables, functions, expressions and special registers. This section describes the data types referred to in the examples. For a full list and complete description of other data types refer to the *SQL Reference*.

Character String

A *character string* is a sequence of bytes. The length of the string is the number of bytes in the sequence. If the length is zero, the value is called the *empty string*.

Fixed-Length Character String

CHAR(x) is a fixed length string. The length attribute x must be between 1 and 254, inclusive.

Varying-Length Character String

Varying-length character strings are of three types: VARCHAR, LONG VARCHAR, and CLOB.

VARCHAR(x) types are varying-length strings, so a string of length 9 can be inserted into VARCHAR(15) but will still have a string length of 9.

See “Large Objects (LOBs)” on page 67 for details on CLOB.

Graphic String

A *graphic string* is a sequence of double-byte character data.

Fixed-Length Graphic String

GRAPHIC(x) is a fixed length string. The length attribute x must be between 1 and 127, inclusive.

Varying-Length Graphic String

Varying-length graphic strings are of three types: VARGRAPHIC, LONG VARGRAPHIC, and DBCLOB. See “Large Objects (LOBs)” on page 67 for details on DBCLOB.

Binary String

A *binary string* is a sequence of bytes. It is used to hold nontraditional data such as pictures. Binary Large Object (BLOB) is a binary string. See “Large Objects (LOBs)” on page 67 for more information.

Numbers

All numbers have a sign and a *precision*. The precision is the number of bits or digits excluding the sign.

SMALLINT

A *SMALLINT* (*small integer*) is a two byte integer with a precision of 5 digits.

INTEGER

An *INTEGER* (*large integer*) is a four byte integer with a precision of 10 digits.

BIGINT

A *BIGINT* (*big integer*) is an eight byte integer with a precision of 19 digits.

REAL A *REAL* (*single-precision floating-point number*) is a 32 bit approximation of a real number.

DOUBLE

A *DOUBLE* (*double-precision floating-point number*) is a 64 bit approximation of a real number. **DOUBLE** is also referred to as **FLOAT**.

DECIMAL(p,s)

A *DECIMAL* is a decimal number. The position of the decimal point is determined by the *precision* (*p*) and the *scale* (*s*) of the number. Precision is the total number of digits and has to be less than 32. Scale is the number of digits in the fractional part and is always smaller than or equal to the value of precision. The decimal value defaults to precision of 5 and scale of 0 if precision and scale are not specified.

Datetime Values

Datetime values are representations of dates, times, and timestamps (a character string of 14 digits that represents a valid date and time in the form *yyyymmddhhmmss*). Datetime values can be used in certain arithmetic and string operations and are compatible with certain strings, however they are neither strings nor numbers.¹

Date A *date* is a three-part value (year, month, and day).

Time A *time* is a three-part value (hour, minute, and second) designating a time of day using a 24-hour clock.

Timestamp

A *timestamp* is a seven-part value (year, month, day, hour, minute, second, and microsecond) designating a date and time.

Null Value

1. In this book we refer to ISO representations of datetime values.

The *null* value is a special value that is distinct from all non-null values. It means the absence of any other value for that column in the row. The null value exists for all data types.

The following table highlights characteristics of data types used in the examples. All numeric data types are defined in a certain range. The range of numeric data types is also included in this table. You can use this table as a quick reference for proper data type usage.

Data Type	Type	Characteristic	Example or Range
CHAR(15)	fixed-length character string	Maximum length of 254	'Sunny day'
VARCHAR(15)	varying-length character string	Maximum length of 32672	'Sunny day'
SMALLINT	number	2 bytes in length precision of 5 digits	range is -32768 to 32767
INTEGER	number	4 bytes in length precision of 10 digits	range is -2147483648 to 2147483647
BIGINT	number	8 bytes in length precision of 19 digits	range is -9223372036854775808 to 9223372036854775807
REAL	number	single-precision floating point 32 bit approximation	range is -3.402E+38 to -1.175E-37 or 1.175E-37 to -3.402E+38 or zero
DOUBLE	number	double-precision floating point 64 bit approximation	range is -1.79769E+308 to -2.225E-307 or 2.225E-307 to 1.79769E+308 or zero
DECIMAL(5,2)	number	precision is 5 scale is 2	range is -10**31+1 to 10**31-1
DATE	datetime	three-part value	1991-10-27
TIME	datetime	three-part value	13.30.05
TIMESTAMP	datetime	seven-part value	1991-10-27-13.30.05.000000

See the Data Type Compatibility table in the *SQL Reference* for more information.

Chapter 3. Creating Tables and Views

This chapter describes how you can create and manipulate tables and views in DB2 Universal Database. The relationship of tables and views is explored through diagrams and examples.

This chapter covers:

- Creating Tables and Creating Views
- Inserting Data
- Changing Data
- Deleting Data
- Using Views to Manipulate Data

Creating Tables

Create your own tables using the CREATE TABLE statement, specifying the column names and types, as well as *constraints*. Constraints are discussed in “Enforcing Business Rules with Constraints and Triggers” on page 51.

The following statement creates a table named PERS, which is similar to the STAFF table but has an additional column for date of birth.

```
CREATE TABLE PERS
( ID          SMALLINT          NOT NULL,
  NAME        VARCHAR(9),
  DEPT        SMALLINT WITH DEFAULT 10,
  JOB         CHAR(5),
  YEARS       SMALLINT,
  SALARY      DECIMAL(7,2),
  COMM        DECIMAL(7,2),
  BIRTH_DATE  DATE)
```

This statement creates a table with no data in it. The next section describes how to insert data into a new table.

As shown in the example, you specify both a name and a data type for each column. Data types are discussed in “Data Types” on page 5. NOT NULL is optional and may be specified to indicate that null values are not allowed in a column. Default values are also optional.

There are many other options you can specify in a CREATE TABLE statement, such as *unique constraints* or *referential constraints*. For more information about all of the options, see the CREATE TABLE statement in the *SQL Reference*.

Inserting Data

When you create a new table, it does not contain any data. To enter new rows into a table, you use the INSERT statement. This statement has two general forms:

- With one form, you use a VALUES clause to specify values for the columns of one or more rows. The next three examples insert data into tables using this general form.
- With the other form, rather than specifying VALUES, you specify a *fullselect* to identify columns from rows contained in other tables and/or views.

Fullselect is a select statement used in INSERT or CREATE VIEW statements, or following a predicate. A fullselect that is enclosed in parentheses is commonly referred to as a *subquery*.

Depending on the default options that you have chosen when creating your table, for every row you insert, you either supply a value for each column or accept a default value. The default values for the various data types are discussed in the *SQL Reference*.

The following statement uses a VALUES clause to insert one row of data into the PERS table:

```
INSERT INTO PERS
VALUES (12, 'Harris', 20, 'Sales', 5, 18000, 1000, '1950-1-1')
```

The following statement uses the VALUES clause to insert three rows into the PERS table where only the IDs, the names, and the jobs are known. If a column is defined as NOT NULL and it does not have a default value, you must specify a value for it.

The NOT NULL clause on a column definition in a CREATE TABLE statement can be extended with the words WITH DEFAULT. If a column is defined as NOT NULL WITH DEFAULT or a constant default such as WITH DEFAULT 10, and you do not specify the column in the column list, the default value is inserted into that column in the inserted row. For example, in the CREATE TABLE statement, a default value was only specified for DEPT column and it was defined to be 10. Hence, the department number (DEPT) is set to 10 and any other column that is not explicitly given a value is set to NULL.

```
INSERT INTO PERS (NAME, JOB, ID)
VALUES ('Swagerman', 'Prgmr', 500),
       ('Limoges', 'Prgmr', 510),
       ('Li', 'Prgmr', 520)
```

The following statement returns the result of the insertions:

```

SELECT *
FROM PERS

```

ID	NAME	DEPT	JOB	YEARS	SALARY	COMM	BIRTH_DATE
12	Harris	20	Sales	5	18000.00	1000.00	01/01/1950
500	Swagerman	10	Prgmr	-	-	-	-
510	Limoges	10	Prgmr	-	-	-	-
520	Li	10	Prgmr	-	-	-	-

Note that, in this case, values were not specified for every column. NULL values are displayed as a dash (-). For this to work, the list of column names has to correspond both in order and in data type to the values provided in the VALUES clause. If the list of column names is omitted (as it was in the first example), the list of data values after VALUES must be in the same order as the columns in the table into which they are inserted, and the number of values must equal the number of columns in the table.

Each value must be compatible with the data type of the column into which it is inserted. If a column is defined as nullable and a value for that column is not specified, then the value NULL is given to that column in the inserted row.

The following example inserts the null value into YEARS, COMM and BIRTH_DATE since values have not been specified for those columns in the row.

```

INSERT INTO PERS (ID, NAME, JOB, DEPT, SALARY)
VALUES (410, 'Perna', 'Sales', 20, 20000)

```

The second form of the INSERT statement is very handy for populating a table with values from rows in another table. As mentioned, rather than specifying VALUES, you specify a fullselect to identify columns from rows contained in other tables and/or views.

The following example selects data from the STAFF table for members of department 38 and inserts it into the PERS table:

```

INSERT INTO PERS (ID, NAME, DEPT, JOB, YEARS, SALARY)
SELECT ID, NAME, DEPT, JOB, YEARS, SALARY
FROM STAFF
WHERE DEPT = 38

```

After this insertion, the following SELECT statement produces a result equal to the fullselect in the INSERT statement.

```

SELECT ID, NAME, DEPT, JOB, YEARS, SALARY
FROM PERS
WHERE DEPT = 38

```

The result is:

ID	NAME	DEPT	JOB	YEARS	SALARY
30	Marenghi	38	Mgr	5	17506.75
40	O'Brien	38	Sales	6	18006.00
60	Quigley	38	Sales	-	16808.30
120	Naughton	38	Clerk	-	12954.75
180	Abrahams	38	Clerk	3	12009.75

Changing Data

Use the UPDATE statement to change the data in a table. With this statement, you can change the value of one or more columns for each row that satisfies the search condition of the WHERE clause.

The following example updates information on the employee whose ID is 410:

```
UPDATE PERS
  SET JOB='Prgmr', SALARY = SALARY + 300
  WHERE ID = 410
```

The SET clause specifies the columns to be updated and provides the values.

The WHERE clause is optional and it specifies the rows to be updated. If the WHERE clause is omitted, the database manager updates each row in the table or view with the values you supply.

In this example, first the table (PERS) is named, then a condition is specified for row that is to be updated. The information for employee number 410 has changed: the employee's job title changed to Prgmr, and the employee's salary increased by \$300.

You can change data in more than one row by including a WHERE clause that applies to two or more rows. The following example increases the salary of every salesperson by 15%:

```
UPDATE PERS
  SET SALARY = SALARY * 1.15
  WHERE JOB = 'Sales'
```

Deleting Data

Use the DELETE statement to delete rows of data from a table based on the search condition specified in the WHERE clause. The following example deletes the row in which the employee ID is 120:

```
DELETE FROM PERS
  WHERE ID = 120
```

The WHERE clause is optional and it specifies the rows to be deleted. If the WHERE clause is omitted, the database manager deletes all rows in the table or view.

You can use the DELETE statement to delete more than one row. The following example deletes all rows in which the employee DEPT is 20:

```
DELETE FROM PERS
WHERE DEPT = 20
```

When you delete a row, you remove the entire row, not specific column values from it.

To delete the definition of a table as well as its contents, issue the DROP TABLE statement as described in the *SQL Reference*.

Creating Views

As discussed in “Views” on page 4, a view provides an alternate way of looking at data in one or more tables. By creating views, you can restrict the information you want various users to look at. The following diagram shows the relationship between views and tables.

In Figure 2 on page 14, View_A restricts access to only columns AC1 and AC2 of TABLE_A.

View_AB allows access to column AC3 in TABLE_A and BC2 in TABLE_B.

By creating View_A, you restrict the access users can have to TABLE_A, and, by creating VIEW_AB, you restrict access to certain columns in both tables.

Database

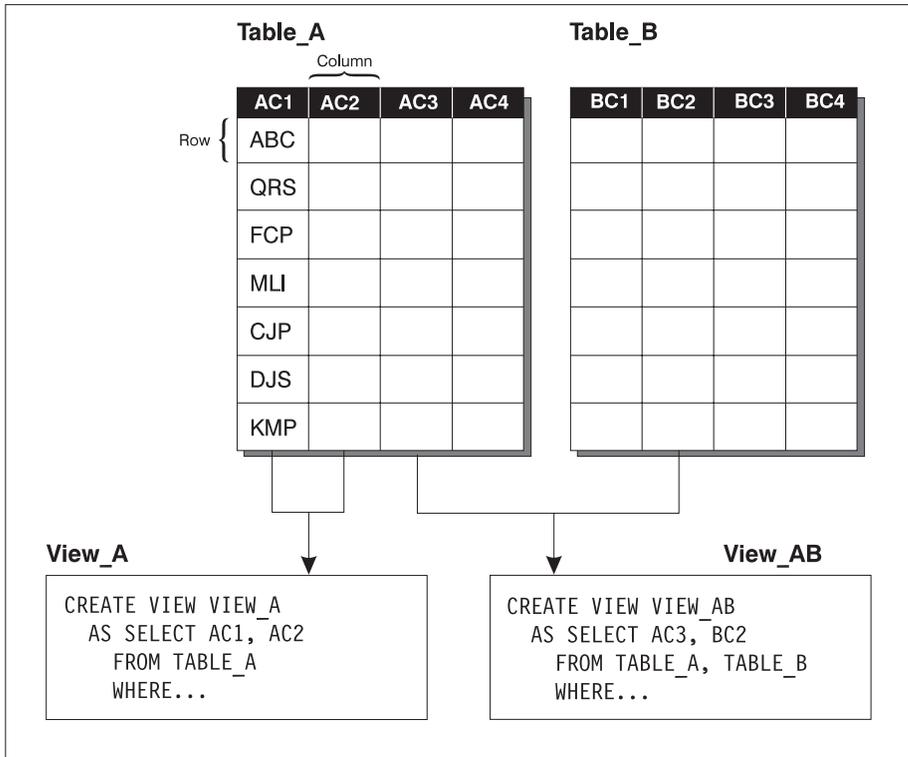


Figure 2. Relationship Between Tables and Views

The following statement creates a view of the non-managers in department 20 in the STAFF table, where salary and commission do not show through from the base table.

```
CREATE VIEW STAFF_ONLY
AS SELECT ID, NAME, DEPT, JOB, YEARS
FROM STAFF
WHERE JOB <> 'Mgr' AND DEPT=20
```

After creating the view, the following statement displays the contents of the view:

```
SELECT *
FROM STAFF_ONLY
```

This statement produces the following result:

ID	NAME	DEPT	JOB	YEARS
20	Pernal	20	Sales	8
80	James	20	Clerk	-
190	Sneider	20	Clerk	8

As a further example, we can use the STAFF and ORG tables to create a view that lists the name of each department and the name of the manager of that department. The following statement creates this view:

```
CREATE VIEW DEPARTMENT_MGRS
AS SELECT NAME, DEPTNAME
FROM STAFF, ORG
WHERE MANAGER = ID
```

You can put additional constraints on inserts and updates of a table through a view by using the WITH CHECK OPTION clause when you create a view. This clause causes the database manager to validate that any updates of or insertions into the view conform to the view definition, and to reject those that do not. If you omit this clause, inserts and updates are not checked against the view definition. For details on how WITH CHECK OPTION works refer to the CREATE VIEW statement in the *SQL Reference*.

Using Views to Manipulate Data

Like the SELECT statement, INSERT, DELETE, and UPDATE statements are applied to a view just as though it were a real table. The statements manipulate the data in the underlying base table(s). So when you access the view again, it is evaluated using the most current base table(s). If you do not use the WITH CHECK OPTION clause, data that you modify using a view may not appear in the repeated accesses of the view, as the data may no longer fit the original view definition.

The following is an example of an update applied to the view FIXED_INCOME:

```
CREATE VIEW FIXED_INCOME (LNAME, DEPART, JOBTITLE, NEWSALARY)
AS SELECT NAME, DEPT, JOB, SALARY
FROM PERS
WHERE JOB <> 'Sales' WITH CHECK OPTION

UPDATE FIXED_INCOME
SET NEWSALARY = SALARY * 1.10
WHERE LNAME = 'Li'
```

The update in the previous view is equivalent to (except for the check option) to updating the base table PERS:

```
UPDATE PERS
SET SALARY = SALARY * 1.10
WHERE NAME = 'Li'
AND JOB <> 'Sales'
```

Note that because the view is created using the WITH CHECK OPTION for the constraint JOB <> 'Sales' in CREATE VIEW FIXED_INCOME, the following update will not be allowed when Limoges moves over to sales:

```
UPDATE FIXED_INCOME
SET JOBTITLE = 'Sales'
WHERE LNAME = 'Limoges'
```

Columns defined by expressions such as SALARY + COMM or SALARY * 1.25 cannot be updated. If you define a view containing one or more such columns, the owner does not receive the UPDATE privilege on these columns. INSERT statements are not permitted on views containing such columns, but DELETE statements are.

Consider a PERS table with none of the columns defined as NOT NULL. You could insert rows into the PERS table through the FIXED_INCOME view even though it does not contain the ID, YEARS, COMM or BIRTHDATE from underlying table PERS. Columns not visible through the view are set to NULL or the default value, as appropriate.

However, the PERS table does have column ID defined as NOT NULL. If you try to insert a row through the FIXED_INCOME view, the system attempts to insert NULL values into all the PERS columns that are “invisible” through the view. Because the ID column is not included in the view and does not permit null values, the system does not permit the insertion through the view.

For rules and restrictions on modifying views, refer to the CREATE VIEW statement in the *SQL Reference*.

Chapter 4. Using SQL Statements to Access Data

This section describes how to connect to a database and retrieve data using SQL statements.

In the examples, we present the statement to be entered followed (in most cases) by the results that will be displayed when that statement is issued against the sample database. Note that although we show the statements in uppercase, you can enter them in any mixture of upper and lowercase characters (except where they are enclosed in either single quotes (') or quotes (")).

The SAMPLE database, included with DB2 Universal Database, consists of several tables, as listed in "Appendix A. Sample Database Tables" on page 71. This database can be created using the "First Steps" installation launchpad. You can also create the SAMPLE database from the command line. See the *SQL Reference* for further details.

Note that additional sample databases are included with DB2 Universal Database to demonstrate the Data Warehouse Center and OLAP Starter Kit functionality. The examples in this book use only the general SAMPLE database.

Depending on how your database has been set up, you may have to qualify the table names used by prefixing them with the schema name and a period. For examples in this book, the default schema is assumed to be USERID. So you could refer to the table ORG as USERID.ORG. Ask your administrator whether or not this is necessary.

This chapter covers:

- Connecting to a Database
- Investigating Errors
- Selecting Columns and Selecting Rows
- Sorting Rows and Removing Duplicate Rows
- Order of Operations
- Using Expressions to Calculate Values
- Naming Expressions
- Selecting Data from More Than One Table
- Using a Subquery
- Using Functions

- Grouping

Connecting to a Database

You need to connect to a database before you can use SQL statements to query or manipulate it. The `CONNECT` statement associates a database connection with a user name.

For example, to connect to the `SAMPLE` database, type the following command in the DB2 command line processor :

```
CONNECT TO SAMPLE USER USERID USING PASSWORD
```

(Be sure to choose a user ID and password that are valid on the server system.)

In this example, `USER` is `USERID` and `USING` is `PASSWORD`.

The following message tells you that you have made a successful connection:

Database Connection Information

```
Database product      = DB2/NT 7.1.0
SQL authorization ID  = USERID
Local database alias  = SAMPLE
```

Once you are connected, you can start manipulating the database. For further details on connections, refer to the `CONNECT` statement in the *SQL Reference*.

Investigating Errors

Whenever you make a mistake typing in any of the examples, or if an error occurs during execution of an SQL statement, the database manager returns an error message. The error message consists of a message identifier, a brief explanation, and an `SQLSTATE`.

`SQLSTATE` errors are error codes common to the DB2 family of products. `SQLSTATE` errors conform to the ISO/ANSI SQL92 standard.

For example, if the user ID or password had been incorrect in the `CONNECT` statement, the database manager would have returned a message identifier of `SQL1403N` and an `SQLSTATE` of `08004`. The message is as follows:

```
SQL1403N The username and/or password supplied is
incorrect.  SQLSTATE=08004
```

You can get more information about the error message by typing a question mark (?) then the message identifier or the `SQLSTATE`:

```

? SQL1403N
OR
? SQL1403
OR
? 08004

```

Note that the second last line in the description of the error SQL1403N states that the SQLCODE is -1403. SQLCODE is a product specific error code. Message identifiers ending with N (Notification) or C (Critical) represent an error and have negative SQLCODEs. Message identifiers ending with W (Warning) represent a warning and have positive SQLCODEs.

Selecting Columns

Use the SELECT statement to select specific columns from a table. In the statement specify a list of column names separated by commas. This list is referred to as a *select list*.

The following statement selects department names (DEPTNAME) and department numbers (DEPTNUMB) from the ORG table of the SAMPLE database:

```

SELECT DEPTNAME, DEPTNUMB
FROM ORG

```

The above statement produces the following result:

DEPTNAME	DEPTNUMB
-----	-----
Head Office	10
New England	15
Mid Atlantic	20
South Atlantic	38
Great Lakes	42
Plains	51
Pacific	66
Mountain	84

By using an asterisk (*) you can select all the columns from the table. The next example lists all columns and rows from the ORG table:

```

SELECT *
FROM ORG

```

This statement produces the following result:

DEPTNUMB	DEPTNAME	MANAGER	DIVISION	LOCATION
-----	-----	-----	-----	-----
10	Head Office	160	Corporate	New York
15	New England	50	Eastern	Boston

20 Mid Atlantic	10 Eastern	Washington
38 South Atlantic	30 Eastern	Atlanta
42 Great Lakes	100 Midwest	Chicago
51 Plains	140 Midwest	Dallas
66 Pacific	270 Western	San Francisco
84 Mountain	290 Western	Denver

Selecting Rows

To select specific rows from a table, after the `SELECT` statement use the `WHERE` clause to specify the condition or conditions that a row must meet to be selected. A criterion for selecting rows from a table is a *search condition*.

A search condition consists of one or more *predicates*. A predicate specifies a condition that is true or false (or unknown) about a row. You can specify conditions in the `WHERE` clause by using the following basic predicates:

Predicate	Function
<code>x = y</code>	x is equal to y
<code>x <> y</code>	x is not equal to y
<code>x < y</code>	x is less than y
<code>x > y</code>	x is greater than y
<code>x <= y</code>	x is less than or equal to y
<code>x >= y</code>	x is greater than or equal to y
<code>IS NULL/IS NOT NULL</code>	tests for null values

When you construct search conditions, be careful to perform arithmetic operations only on numeric data types, and to make comparisons only among compatible data types. For example, you can't compare text strings to numbers.

If you are selecting rows based on a character value, that value must be enclosed in single quotation marks (for example, `WHERE JOB = 'Clerk'`) and each character value must be typed exactly as it exists in the database. If the data value is lowercase in the database and you type it as uppercase, no rows will be selected. If you are selecting rows based on a numeric value, that value must not be enclosed in quotation marks (for example, `WHERE DEPT = 20`).

The following example selects only the rows for department 20 from the `STAFF` table:

```
SELECT DEPT, NAME, JOB
FROM STAFF
WHERE DEPT = 20
```

This statement produces the following result:

DEPT	NAME	JOB
20	Sanders	Mgr
20	Pernal	Sales
20	James	Clerk
20	Sneider	Clerk

The next example uses AND to specify more than one condition. You can specify as many conditions as you want. The example selects clerks in department 20 from the STAFF table:

```
SELECT DEPT, NAME, JOB
FROM STAFF
WHERE JOB = 'Clerk'
AND DEPT = 20
```

This statement produces the following result:

DEPT	NAME	JOB
20	James	Clerk
20	Sneider	Clerk

A null value occurs where no value is entered and the column does not support a default value. It can also occur where the value is specifically set to null. It can occur only in columns that are defined to support null values. Defining and supporting null values in tables are discussed in “Creating Tables” on page 9.

Use the predicates IS NULL and IS NOT NULL to check for a null value.

The following statement lists employees whose commission is not known:

```
SELECT ID, NAME
FROM STAFF
WHERE COMM IS NULL
```

This statement produces the following result:

ID	NAME
10	Sanders
30	Marenghi
50	Hanes
100	Plotz
140	Fraye
160	Molinare
210	Lu
240	Daniels

```
260 Jones
270 Lea
290 Quill
```

The value zero is not the same as the null value. The following statement selects everyone in a table whose commission is zero:

```
SELECT ID, NAME
FROM STAFF
WHERE COMM = 0
```

Because there are no values of zero in the COMM column in the sample table, the result set returned is empty.

The next example selects all rows where the value of YEARS in the STAFF table is greater than 9:

```
SELECT NAME, SALARY, YEARS
FROM STAFF
WHERE YEARS > 9
```

This statement produces the following result:

NAME	SALARY	YEARS
Hanes	20659.80	10
Lu	20010.00	10
Jones	21234.00	12
Quill	19818.00	10
Graham	21000.00	13

Sorting Rows

You may want the information returned in a specific order. Use the ORDER BY clause to sort the information by the values in one or more columns.

The following statement displays the employees in department 84 ordered by number of years employed:

```
SELECT NAME, JOB, YEARS
FROM STAFF
WHERE DEPT = 84
ORDER BY YEARS
```

This statement produces the following result:

NAME	JOB	YEARS
Davis	Sales	5
Gafney	Clerk	5
Edwards	Sales	7
Quill	Mgr	10

Specify **ORDER BY** as the last clause in the entire **SELECT** statement. Columns named in this clause can be expressions or any column of the table. The column names in the **ORDER BY** clause do not have to be specified in the select list.

You can order rows in ascending or descending order by explicitly specifying either **ASC** or **DESC** within the **ORDER BY** clause. If neither is specified, the rows are automatically ordered in ascending sequence. The following statement displays the employees in department 84 in descending order by number of years employed:

```

SELECT NAME, JOB, YEARS
FROM STAFF
WHERE DEPT = 84
ORDER BY YEARS DESC

```

This statement produces the following result:

NAME	JOB	YEARS
Quill	Mgr	10
Edwards	Sales	7
Davis	Sales	5
Gafney	Clerk	5

You can order rows by character values as well as numeric values. The following statement displays the employees in department 84 in alphabetical order by name:

```

SELECT NAME, JOB, YEARS
FROM STAFF
WHERE DEPT = 84
ORDER BY NAME

```

This statement produces the following result:

NAME	JOB	YEARS
Davis	Sales	5
Edwards	Sales	7
Gafney	Clerk	5
Quill	Mgr	10

Removing Duplicate Rows

When using the SELECT statement, you may not want duplicate information to be returned. For example, STAFF has a DEPT column in which several department numbers are listed more than once, and a JOB column in which several job descriptions are listed more than once.

To eliminate duplicate rows, use the DISTINCT option on the SELECT clause. For example, if you insert DISTINCT into the statement, each job within a department is listed only once:

```
SELECT DISTINCT DEPT, JOB
FROM STAFF
WHERE DEPT < 30
ORDER BY DEPT, JOB
```

This statement produces the following result:

```
DEPT  JOB
-----  -----
      10 Mgr
      15 Clerk
      15 Mgr
      15 Sales
      20 Clerk
      20 Mgr
      20 Sales
```

DISTINCT has eliminated all rows that contain duplicate data in the set of columns specified in the SELECT statement.

Order of Operations

It is important to take into account the order of operations. The output from one clause is the input to the next one, as stated in the list below. An example where order of operations is a consideration is presented in “Naming Expressions” on page 25.

The following sequence of operations is not necessarily the way that the operations are performed within the DB2 code. This simple explanation merely allows for a more intuitive means of thinking about queries. The sequence of operations is as follows:

1. FROM clause
2. WHERE clause
3. GROUP BY clause
4. HAVING clause
5. SELECT clause
6. ORDER BY clause

Using Expressions to Calculate Values

An *expression* is a calculation or function that you include in a statement. The following statement calculates what the salaries for each employee in department 38 would be if each received a \$500 bonus:

```
SELECT DEPT, NAME, SALARY + 500
FROM STAFF
WHERE DEPT = 38
ORDER BY 3
```

This result is:

DEPT	NAME	3
38	Abrahams	12509.75
38	Naughton	13454.75
38	Quigley	17308.30
38	Marenghi	18006.75
38	O'Brien	18506.00

Note that the column name for the third column is a number. This is a system generated number, since SALARY+500 does not specify a column name. Later on this number is used in the ORDER BY clause to refer to the third column. "Naming Expressions" talks about how to give meaningful names to expressions.

You can form arithmetic expressions using the basic arithmetic operators for addition (+), subtraction (-), multiplication (*), and division (/).

The operators can operate on numeric values from several different types of operands, some of which are:

- Column names (as in RATE * HOURS)
- Constant values (as in RATE * 1.07)
- Scalar functions (as in LENGTH(NAME) + 1).

Naming Expressions

The optional AS clause lets you assign a meaningful name to an expression, which makes referring back to the expression easier. You can use an AS clause to provide a name for any item in the select list.

The following statement displays all employees whose salary plus commission is less than \$13,000. The expression SALARY + COMM is named PAY:

```
SELECT NAME, JOB, SALARY + COMM AS PAY
FROM STAFF
WHERE (SALARY + COMM) < 13000
ORDER BY PAY
```

This statement produces the following result:

NAME	JOB	PAY
Yamaguchi	Clerk	10581.50
Burke	Clerk	11043.50
Scoutten	Clerk	11592.80
Abrahams	Clerk	12246.25
Kermisch	Clerk	12368.60
Ngan	Clerk	12714.80

By using the AS clause, you can refer to a particular column name rather than the system generated number in the ORDER BY clause. In this example we compare (SALARY + COMM) with 13000 in the WHERE clause, instead of using the name PAY. This is a result of the order of operations. The WHERE clause is evaluated before (SALARY + COMM) is given the name PAY, because the SELECT clause is executed after the WHERE clause. Hence, PAY cannot be used in the predicate.

Selecting Data from More Than One Table

You can use the SELECT statement to produce reports that contain information from two or more tables. This is commonly referred to as a *join*. For example, you can join data from the STAFF and ORG tables to form a new table. To join two tables, specify the columns you want to be displayed in the SELECT clause, the table names in a FROM clause and the search condition in the WHERE clause. The WHERE clause is optional.

The next example associates the name of each manager with a department name. You need to select information from two tables since the employee information (STAFF table) and the departmental information (ORG table) are stored separately. The following query selects the NAME and DEPTNAME columns for STAFF and ORG tables, respectively. The search condition narrows down the selection to rows where the values in the MANAGER column are the same as the values in the ID column:

```
SELECT DEPTNAME, NAME
FROM ORG, STAFF
WHERE MANAGER = ID
```

Figure 3 on page 27 demonstrates how columns in two different tables are compared. The boxed values indicate a match where the search condition has been satisfied.

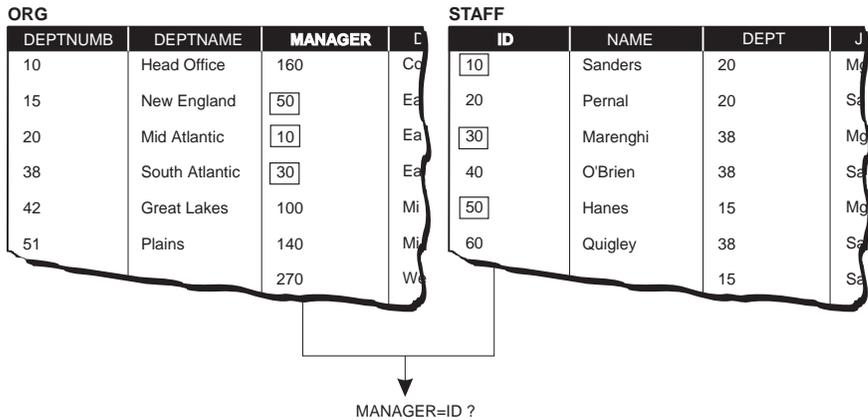


Figure 3. Selecting from STAFF and ORG tables

The SELECT statement produces the following result:

DEPTNAME	NAME
-----	-----
Mid Atlantic	Sanders
South Atlantic	Marenghi
New England	Hanes
Great Lakes	Plotz
Plains	Fraye
Head Office	Molinare
Pacific	Lea
Mountain	Quill

The result lists the name of each manager and his or her department.

Using a Subquery

When you write an SQL SELECT statement, you can place additional SELECT statements within the WHERE clause. Each additional SELECT starts a subquery.

A subquery can then, in turn, include another separate subquery, whose result is substituted into the original subquery's WHERE clause. In addition, a WHERE clause can include subqueries in more than one search condition. The subquery can refer to tables and columns that are different than the ones used in the main query.

The following statement selects the division and location from the ORG table of the employee whose ID in the STAFF table is 280:

```

SELECT DIVISION, LOCATION
FROM ORG
WHERE DEPTNUMB = (SELECT DEPT
                  FROM STAFF
                  WHERE ID = 280)

```

When processing a statement, DB2 first determines the result of the subquery. The result from this example's subquery is 66, since the employee with ID 280 is in department 66. The final result is then taken from the row of the ORG table whose DEPTNUMB column has the value of 66. The final result is:

```

DIVISION  LOCATION
-----  -
Western   San Francisco

```

When you use a subquery, the database manager evaluates it and substitutes the resulting value directly into the WHERE clause.

Subqueries are further discussed in "Correlated Subqueries" on page 39.

Using Functions

This section gives you a brief introduction to functions that will be used in the examples throughout the book. A *database function* is a relationship between a set of input data values and a result value.

Functions can be either *built-in* or *user-defined*. DB2 Universal Database delivers many built-in and preinstalled user-defined functions.

You can find the built-in functions in the SYSIBM schema; and the preinstalled user-defined functions are in the SYSFUN schema. SYSIBM and SYSFUN are reserved schemas.

The built-in and preinstalled user-defined functions will never satisfy all user requirements. Therefore, application developers may need to create their own suite of functions, specifically aimed at their applications. User-defined functions make this possible, expanding the scope of DB2 Universal Database to include, for example, customized business or scientific functions. This is further discussed in the "User-Defined Functions" on page 66.

Column Functions

Column functions operate on a set of values in a column to derive a single result value. The following are just a few examples of column functions. For a full list, refer to the *SQL Reference*.

AVG Returns the sum of the values in a set divided by the number of values in that set

COUNT	Returns the number of rows or values in a set of rows or values
MAX	Returns the largest value in a set of values
MIN	Returns the smallest value in a set of values

The following statement selects the maximum salary from the STAFF table:

```
SELECT MAX(SALARY)
FROM STAFF
```

This statement returns the value 22959.20 from the STAFF sample table.

The next example selects the names and salaries of employees whose income is more than the average income yet have been with the company less than the average number of years.

```
SELECT NAME, SALARY
FROM STAFF
WHERE SALARY > (SELECT AVG(SALARY) FROM STAFF)
AND YEARS < (SELECT AVG(YEARS) FROM STAFF)
```

This statement produces the following result:

NAME	SALARY
Marenghi	17506.75
Daniels	19260.25
Gonzales	16858.20

In the above example, in the WHERE clause, the column function is stated in a *subquery* as opposed to being directly implemented (for example: WHERE SALARY > AVG(SALARY)). Column functions cannot be stated in the WHERE clause. This is due to the order of operations. Think of the WHERE clause as being evaluated before the SELECT clause. Consequently, when the WHERE clause is being evaluated, the column function does not have access to the set of values. This set of values is selected at a later time by the SELECT clause.

You can use the DISTINCT element as part of the argument of a column function to eliminate duplicate values before a function is applied. Thus, COUNT(DISTINCT WORKDEPT) computes the number of different departments.

Scalar Functions

A *scalar function* performs an operation on a single value to return another single value. The following are just a few examples of scalar functions provided by DB2 Universal Database.

ABS	Return the absolute value of a number
------------	---------------------------------------

HEX	Returns the hexadecimal representation of a value
LENGTH	Returns the number of bytes in an argument (for a graphic string it returns the number of double-byte characters.)
YEAR	Extract the year portion of a datetime value

For a detailed list and description of scalar functions refer to the *SQL Reference*.

The following statement returns the department names from the ORG table together with the length of each of these names:

```
SELECT DEPTNAME, LENGTH(DEPTNAME)
FROM ORG
```

This statement produces the following result:

DEPTNAME	2
Head Office	11
New England	11
Mid Atlantic	12
South Atlantic	14
Great Lakes	11
Plains	6
Pacific	7
Mountain	8

Note: Since the AS clause was not used to give a meaningful name to LENGTH(DEPTNAME), a system generated number appears in the second column.

Table Functions

Table functions return columns of a table, resembling the table created by a simple CREATE TABLE statement.

A table function can only be used in the FROM clause of an SQL statement.

The only table function currently supported in DB2 Universal Database is SQLCACHE_SNAPSHOT.

SQLCACHE_SNAPSHOT

Returns the results of a snapshot of the DB2 dynamic SQL statement cache as a table.

Grouping

DB2 Universal Database has the capability of analyzing data based on particular columns of a table.

You can organize rows according to a grouping structure defined in a GROUP BY clause. In its simplest form, a *group* is a set of rows, each having identical values in the "GROUP BY" columns. The column names in the SELECT clause must be either a grouping column or a column function. Column functions return a value for each group defined by the GROUP BY clause. Each group is represented by a single row in the result set. The following example produces a result that lists the maximum salary for each department number:

```
SELECT DEPT, MAX(SALARY) AS MAXIMUM
FROM STAFF
GROUP BY DEPT
```

This statement produces the following result:

DEPT	MAXIMUM
10	22959.20
15	20659.80
20	18357.50
38	18006.00
42	18352.80
51	21150.00
66	21000.00
84	19818.00

Note that the MAX(SALARY) is calculated for each department, a group defined by the GROUP BY clause, not the entire company.

Using a WHERE Clause with a GROUP BY Clause

A grouping query can have a standard WHERE clause that eliminates non-qualifying rows before the groups are formed and the column functions are computed. You have to specify the WHERE clause *before* the GROUP BY clause. For example:

```
SELECT WORKDEPT, EDLEVEL, MAX(SALARY) AS MAXIMUM
FROM EMPLOYEE
WHERE HIREDATE > '1979-01-01'
GROUP BY WORKDEPT, EDLEVEL
ORDER BY WORKDEPT, EDLEVEL
```

The result is:

WORKDEPT	EDLEVEL	MAXIMUM
D11	17	18270.00
D21	15	27380.00
D21	16	36170.00
D21	17	28760.00
E11	12	15340.00
E21	14	26150.00

Note that every column name specified in the SELECT statement is also mentioned in the GROUP BY clause. Not mentioning the column names in

both places will give you an error. The GROUP BY clause returns a row for each unique combination of WORKDEPT and EDLEVEL.

Using the HAVING Clause After the GROUP BY Clause

You can apply a qualifying condition to groups so that DB2 returns a result only for the groups that satisfy the condition. To do this, include a HAVING clause *after* the GROUP BY clause. A HAVING clause can contain one or more predicates connected by ANDs and ORs. Each predicate compares a property of the group (such as AVG(SALARY)) with either:

- Another property of the group

For example:

```
HAVING AVG(SALARY) > 2 * MIN(SALARY)
```

- A constant

For example:

```
HAVING AVG(SALARY) > 20000
```

For example, the following query finds the maximum and minimum salary of departments with more than 4 employees:

```
SELECT WORKDEPT, MAX(SALARY) AS MAXIMUM, MIN(SALARY) AS MINIMUM
FROM EMPLOYEE
GROUP BY WORKDEPT
HAVING COUNT(*) > 4
ORDER BY WORKDEPT
```

This statement produces the following result:

WORKDEPT	MAXIMUM	MINIMUM
D11	32250.00	18270.00
D21	36170.00	17250.00
E11	29750.00	15340.00

It is possible (though unusual) for a query to have a HAVING clause but no GROUP BY clause. In this case, DB2 treats the entire table as one group. Because the table is treated as a single group, you can have at most one result row. If the HAVING condition is true for the table as a whole, the selected result (which must consist entirely of column functions) is returned; otherwise no rows are returned.

Chapter 5. Expressions and Subqueries

DB2 provides flexibility in expressing queries. This chapter describes a few of the important methods available to express complex queries.

This chapter gives a comprehensive description of the following:

- Scalar Fullselects
- Casting Data Types
- Case Expressions
- Table Expressions
- Correlation Names

Scalar Fullselects

A fullselect is a form of query that can be used in SQL statements. A scalar fullselect is a fullselect that returns one row containing only one value. Scalar fullselects are useful for retrieving data values from the database for use in an expression.

- The following example lists names of employees who have a salary greater than the average salary of all employees. The scalar fullselect within the query is the select statement in parentheses.

```
SELECT LASTNAME, FIRSTNAME
FROM EMPLOYEE
WHERE SALARY > (SELECT AVG(SALARY)
FROM EMPLOYEE)
```

- This example finds the average salary of the employees in the STAFF table and the average salary of the employees in the EMPLOYEE table.

```
SELECT AVG(SALARY) AS "Average_Employee",
(SELECT AVG(SALARY) AS "Average_Staff" FROM STAFF)
FROM EMPLOYEE
```

Casting Data Types

There may be times when you need to convert values from one data type to another, for example, from a numeric value to a character string. To convert a value to a different type, use the CAST specification.

Another possible use for a cast specification is to truncate a very long character string. In the EMP_RESUME table the column RESUME is CLOB(5K). You may want to display only the first 370 characters containing

the personal information of the applicant. To display the first 370 characters of the ASCII format of the resumes from the table EMP_RESUME, issue the following query:

```
SELECT EMPNO, CAST(RESUME AS VARCHAR(370))
FROM EMP_RESUME
WHERE RESUME_FORMAT = 'ascii'
```

A warning is issued informing you that values longer than 370 characters are truncated.

You can cast NULL values to other data types that are more convenient for manipulation in a query. “Common Table Expressions” on page 36 is an example of using casting for this purpose.

Case Expressions

You can use CASE expressions in SQL statements to easily manipulate the data representation of a table. This provides a powerful conditional expression capability that is similar in concept to CASE statements in some programming languages.

- To change department numbers from the DEPTNAME column in ORG table into meaningful words, enter the following query:

```
SELECT DEPTNAME,
CASE DEPTNUMB
WHEN 10 THEN 'Marketing'
WHEN 15 THEN 'Research'
WHEN 20 THEN 'Development'
WHEN 38 THEN 'Accounting'
ELSE 'Sales'
END AS FUNCTION
FROM ORG
```

The result is:

DEPTNAME	FUNCTION
Head Office	Marketing
New England	Research
Mid Atlantic	Development
South Atlantic	Accounting
Great Lakes	Sales
Plains	Sales
Pacific	Sales
Mountain	Sales

- You can use CASE expressions to protect against exceptions such as division by zero. In the following example, if the employee has no bonus or commission payment, the statement condition prevents an error by avoiding the division operation:

```

SELECT LASTNAME, WORKDEPT FROM EMPLOYEE
WHERE(CASE
      WHEN BONUS+COMM=0 THEN NULL
      ELSE SALARY/(BONUS+COMM)
      END ) > 10

```

- You can use a CASE expression to produce a ratio of the sum of a subset of values from one column to the sum of all the values from that column. This ratio can be contained in a single statement that uses a CASE expression; this expression requires only a single pass through the data. Without a CASE expression, at least two passes are required to perform the same calculation.

The following example computes the ratio of the sum of the salaries of department 20 to the total of all salaries using a CASE expression:

```

SELECT CAST(CAST (SUM(CASE
                  WHEN DEPT = 20 THEN SALARY
                  ELSE 0
                  END) AS DECIMAL(7,2))/
           SUM(SALARY) AS DECIMAL (3,2))
FROM STAFF

```

The result is 0.11. Note that the CAST functions ensure that the precision of the result is preserved.

- You can use a CASE expression to evaluate a simple function instead of calling the function itself, which would require additional overhead. For example:

```

CASE
  WHEN X<0 THEN -1
  WHEN X=0 THEN 0
  WHEN X>0 THEN 1
END

```

This expression has the same result as the SIGN user-defined function in the SYSFUN schema.

Table Expressions

If you just need the definition of a view for a single query, you can use a *table expression*.

Table expressions are temporary and are only valid for the life of the SQL statement; they cannot be shared like views, but they allow more flexibility than views.

This section describes how to use common table expressions and nested table expressions in queries.

Nested Table Expressions

A nested table expression is a temporary view where the definition is *nested* (defined directly) in the FROM clause of the main query.

The following query uses a nested table expression to find the average total pay, education level and year of hire, for those with an education level greater than 16:

```
SELECT EDLEVEL, HIREYEAR, DECIMAL(AVG(TOTAL_PAY),7,2)
      FROM (SELECT EDLEVEL, YEAR(HIREDATE) AS HIREYEAR,
                  SALARY+BONUS+COMM AS TOTAL_PAY
            FROM EMPLOYEE
            WHERE EDLEVEL > 16) AS PAY_LEVEL
GROUP BY EDLEVEL, HIREYEAR
ORDER BY EDLEVEL, HIREYEAR
```

The result is as follows:

EDLEVEL	HIREYEAR	3
17	1967	28850.00
17	1973	23547.00
17	1977	24430.00
17	1979	25896.50
18	1965	57970.00
18	1968	32827.00
18	1973	45350.00
18	1976	31294.00
19	1958	51120.00
20	1975	42110.00

This query uses a nested table expression to first extract the year of hire from the HIREDATE column so that it can subsequently be used in the GROUP BY clause. You may not want to create this as a view, if you intend to perform similar queries using different values for EDLEVEL.

The scalar built-in function DECIMAL is used in this example. DECIMAL returns a decimal representation of a number or a character string. For more details on functions refer to the *SQL Reference*.

Common Table Expressions

A *common table expression* is a table expression that you create for use throughout a complex query. Define and name it at the start of the query using a WITH clause. Repeated references to a common table expression use the same result set. By comparison, if you used nested table expressions or views, the result set would be regenerated each time, with possibly different results.

The following example lists all the people in the company who have an education level greater than 16, who make less pay on average than those

people who were hired in the same year and who have the same education. The parts of the query are described in further detail following the query.

1

```
WITH
  PAYLEVEL AS
    (SELECT EMPNO, EDLEVEL, YEAR(HIREDATE) AS HIREYEAR,
           SALARY+BONUS+COMM AS TOTAL_PAY
     FROM EMPLOYEE
    WHERE EDLEVEL > 16),
```

2

```
  PAYBYED (EDUC_LEVEL, YEAR_OF_HIRE, AVG_TOTAL_PAY) AS
    (SELECT EDLEVEL, HIREYEAR, AVG(TOTAL_PAY)
     FROM PAYLEVEL
    GROUP BY EDLEVEL, HIREYEAR)
```

3

```
SELECT EMPNO, EDLEVEL, YEAR_OF_HIRE, TOTAL_PAY, DECIMAL(AVG_TOTAL_PAY,7,2)
FROM PAYLEVEL, PAYBYED
WHERE EDLEVEL = EDUC_LEVEL
      AND HIREYEAR = YEAR_OF_HIRE
      AND TOTAL_PAY < AVG_TOTAL_PAY
```

1

This is a common table expression with the name PAYLEVEL. This result table includes an employee number, the year that the person was hired, the total pay for that employee, and his or her education level. Only rows for employees with an education level greater than 16 are included.

2

This is a common table expression with the name PAYBYED (or PAY BY Education). It uses the PAYLEVEL table that was created in the previous common table expression to determine the education level, hire year, and average pay of employees within each education level, hired in the same year. The columns returned by this table have been given different names (EDUC_LEVEL, for example) from the column names used in the select list. This produces a result set named PAYBYED that is the same as the result we produced in the Nested Table Expression example.

3

Finally, we get to the actual query that produces the desired result. The two tables (PAYLEVEL, PAYBYED) are joined to determine those individuals who have total pay that is less than the average pay for people hired in the same year. Note that PAYBYED is based on PAYLEVEL. So PAYLEVEL is effectively accessed twice in the complete statement. Both times the same set of rows are used in evaluating the query.

The final result is as follows:

EMPNO	EDLEVEL	YEAR_OF_HIRE	TOTAL_PAY	5
000210	17	1979	20132.00	25896.50

Correlation Names

A *correlation name* is an identifier used for distinguishing multiple uses of an object. A correlation name can be defined in the FROM clause of a query and in the first clause of an UPDATE or DELETE statement. It can be associated with a table, view, or a nested table expression but only within the context that it is defined.

For example, the clause FROM STAFF S, ORG O establishes S and O as the correlation names for STAFF and ORG, respectively.

```
SELECT NAME, DEPTNAME
FROM STAFF S, ORG O
WHERE O.MANAGER = S.ID
```

Once you have defined a correlation name, you can *only* use the correlation name to qualify the object. For example, in the above example, if we had stated ORG.MANAGER=STAFF.ID the statement would fail.

You can also use a correlation name as a shorter name for referring to a database object. Typing just S is easier than typing STAFF.

By using correlation names, you can make **duplicates** of an object. This is useful when you need to compare entries of a table with itself. In the following example, table EMPLOYEE is compared with another instance of itself to find the managers of all employees. It displays the name of the employees who are not designers, the name of their manager and the department number.

```
SELECT E2.FIRSTNME, E2.LASTNAME, E2.JOB, E1.FIRSTNME AS MGR_FIRSTNAME,
      E1.LASTNAME AS MGR_LASTNAME, E1.WORKDEPT
FROM EMPLOYEE E1, EMPLOYEE E2
WHERE E1.WORKDEPT = E2.WORKDEPT
      AND E1.JOB = 'MANAGER'
      AND E2.JOB <> 'MANAGER'
      AND E2.JOB <> 'DESIGNER'
```

This statement produces the following result:

FIRSTNME	LASTNAME	JOB	MGR_FIRSTNAME	MGR_LASTNAME	WORKDEPT
DOLORES	QUINTANA	ANALYST	SALLY	KWAN	C01
HEATHER	NICHOLLS	ANALYST	SALLY	KWAN	C01
JAMES	JEFFERSON	CLERK	EVA	PULASKI	D21
SALVATORE	MARINO	CLERK	EVA	PULASKI	D21
DANIEL	SMITH	CLERK	EVA	PULASKI	D21
SYBIL	JOHNSON	CLERK	EVA	PULASKI	D21

MARIA	PEREZ	CLERK	EVA	PULASKI	D21
ETHEL	SCHNEIDER	OPERATOR	EILEEN	HENDERSON	E11
JOHN	PARKER	OPERATOR	EILEEN	HENDERSON	E11
PHILIP	SMITH	OPERATOR	EILEEN	HENDERSON	E11
MAUDE	SETRIGHT	OPERATOR	EILEEN	HENDERSON	E11
RAMLAL	MEHTA	FIELDREP	THEODORE	SPENSER	E21
WING	LEE	FIELDREP	THEODORE	SPENSER	E21
JASON	GOUNOT	FIELDREP	THEODORE	SPENSER	E21

Correlated Subqueries

A subquery that is allowed to refer to any of the previously mentioned tables is known as a *correlated subquery*. We also say that the subquery has a *correlated reference* to a table in the main query.

The following example uses an uncorrelated subquery to list the employee number and name of employees in department 'A00' with a salary greater than the average salary of the department:

```
SELECT EMPNO, LASTNAME
FROM EMPLOYEE
WHERE WORKDEPT = 'A00'
AND SALARY > (SELECT AVG(SALARY)
FROM EMPLOYEE
WHERE WORKDEPT = 'A00')
```

This statement produces the following result:

```
EMPNO  LASTNAME
-----
000010 HAAS
000110 LUCCHESI
```

If you want to know the average salary for every department, the subquery needs to be evaluated once for every department. You can do this through the correlation capability of SQL, which permits you to write a subquery that is executed repeatedly, once for each row of the table identified in the outer-level query.

The following example uses a correlated subquery to list all the employees whose salary is higher than the average salary of their department:

```
SELECT E1.EMPNO, E1.LASTNAME, E1.WORKDEPT
FROM EMPLOYEE E1
WHERE SALARY > (SELECT AVG(SALARY)
FROM EMPLOYEE E2
WHERE E2.WORKDEPT = E1.WORKDEPT)
ORDER BY E1.WORKDEPT
```

In this query, the subquery is evaluated once for every department. The result is:

EMPNO	LASTNAME	WORKDEPT
000010	HAAS	A00
000110	LUCCHESI	A00
000030	KWAN	C01
000060	STERN	D11
000150	ADAMSON	D11
000170	YOSHIMURA	D11
000200	BROWN	D11
000220	LUTZ	D11
000070	PULASKI	D21
000240	MARINO	D21
000270	PEREZ	D21
000090	HENDERSON	E11
000280	SCHNEIDER	E11
000100	SPENSER	E21
000330	LEE	E21
000340	GOUNOT	E21

To write a query with a correlated subquery, use the same basic format of an ordinary outer query with a subquery. However, in the FROM clause of the outer query, just after the table name, place a correlation name. The subquery may then contain column references qualified by the correlation name. For example, if E1 is a correlation name, then E1.WORKDEPT means the WORKDEPT value of the current row of the table in the outer query. The subquery is (conceptually) reevaluated for each row of the table in the outer query.

By using a correlated subquery, you let the system do the work for you and reduce the amount of code you need to write within your application.

Unqualified correlated references are allowed in DB2. For example, the table EMPLOYEE has a column named LASTNAME, but the table SALES has a column named SALES_PERSON, and no column named LASTNAME.

```
SELECT LASTNAME, FIRSTNAME, COMM
FROM EMPLOYEE
WHERE 3 > (SELECT AVG(SALES)
FROM SALES
WHERE LASTNAME = SALES_PERSON)
```

In this example, the system checks the innermost FROM clause for a LASTNAME column. Not finding one, it then checks the next innermost FROM clause (which in this case is the outer FROM clause). While not always necessary, qualifying correlated references is recommended to improve the readability of the query and to ensure that you are getting the result that you intend.

Implementing a Correlated Subquery

When would you want to use a correlated subquery? The use of a column function is sometimes a clue.

Let's say you want to list the employees whose level of education is higher than the average for their department.

First, you must determine the select-list items. The problem says "List the employees". This implies that LASTNAME from the EMPLOYEE table should be sufficient to uniquely identify employees. The problem also states the level of education (EDLEVEL) and the employees' departments (WORKDEPT) as conditions. While the problem does not explicitly ask for columns to be displayed, including them in the select-list will help illustrate the solution. A part of the query can now be constructed:

```
SELECT LASTNAME, WORKDEPT, EDLEVEL
FROM EMPLOYEE
```

Next, a search condition (WHERE clause) is needed. The problem statement says, "...whose level of education is higher than the average for that employee's department". This means that for every employee in the table, the average education level for that employee's department must be computed. This statement fits the description of a correlated subquery. Some unknown property (the average level of education of the current employee's department) is being computed for each row. A correlation name is needed for the EMPLOYEE table:

```
SELECT LASTNAME, WORKDEPT, EDLEVEL
FROM EMPLOYEE E1
```

The subquery needed is simple. It computes the average level of education for each department. The complete SQL statement is:

```
SELECT LASTNAME, WORKDEPT, EDLEVEL
FROM EMPLOYEE E1
WHERE EDLEVEL > (SELECT AVG(EDLEVEL)
                  FROM EMPLOYEE E2
                  WHERE E2.WORKDEPT = E1.WORKDEPT)
```

The result is:

LASTNAME	WORKDEPT	EDLEVEL
HAAS	A00	18
KWAN	C01	20
PULASKI	D21	16
HENDERSON	E11	16
LUCCHESI	A00	19
PIANKA	D11	17
SCOUTTEN	D11	17
JONES	D11	17
LUTZ	D11	18

MARINO	D21	17
JOHNSON	D21	16
SCHNEIDER	E11	17
MEHTA	E21	16
GOUNOT	E21	16

Suppose that instead of listing the employee's department number, you list the department name. The information you need (DEPTNAME) is in a separate table (DEPARTMENT). The outer-level query that defines a correlation variable can also be a join query (see "Selecting Data from More Than One Table" on page 26 for details).

When you use joins in an outer-level query, list the tables to be joined in the FROM clause, and place the correlation name next to the appropriate table name.

To modify the query to list the department's name instead of its number, replace WORKDEPT by DEPTNAME in the select-list. The FROM clause must now also include the DEPARTMENT table, and the WHERE clause must express the appropriate join condition.

This is the modified query:

```

SELECT LASTNAME, DEPTNAME, EDLEVEL
FROM EMPLOYEE E1, DEPARTMENT
WHERE E1.WORKDEPT = DEPARTMENT.DEPTNO
AND EDLEVEL > (SELECT AVG(EDLEVEL)
FROM EMPLOYEE E2
WHERE E2.WORKDEPT = E1.WORKDEPT)

```

This statement produces the following result:

LASTNAME	DEPTNAME	EDLEVEL
HAAS	SPIFFY COMPUTER SERVICE DIV.	18
LUCCHESSI	SPIFFY COMPUTER SERVICE DIV.	19
KWAN	INFORMATION CENTER	20
PIANKA	MANUFACTURING SYSTEMS	17
SCOUTTEN	MANUFACTURING SYSTEMS	17
JONES	MANUFACTURING SYSTEMS	17
LUTZ	MANUFACTURING SYSTEMS	18
PULASKI	ADMINISTRATION SYSTEMS	16
MARINO	ADMINISTRATION SYSTEMS	17
JOHNSON	ADMINISTRATION SYSTEMS	16
HENDERSON	OPERATIONS	16
SCHNEIDER	OPERATIONS	17
MEHTA	SOFTWARE SUPPORT	16
GOUNOT	SOFTWARE SUPPORT	16

The above examples show that the correlation name used in a subquery must be defined in the FROM clause of some query that contains the correlated subquery. However, this containment may involve several levels of nesting.

Suppose that some departments have only a few employees and therefore their average education level may be misleading. You might decide that in order for the average level of education to be a meaningful number to compare an employee against, there must be at least five employees in a department. So now we have to list the employees whose level of education is higher than the average for that employee's department, and only consider departments with at least five employees.

The problem implies another subquery because, for each employee in the outer-level query, the total number of employees in that person's department must be counted:

```
SELECT COUNT(*)
  FROM EMPLOYEE E3
 WHERE E3.WORKDEPT = E1.WORKDEPT
```

Only if the count is greater than or equal to 5 is an average to be computed:

```
SELECT AVG(EDLEVEL)
  FROM EMPLOYEE E2
 WHERE E2.WORKDEPT = E1.WORKDEPT
 AND 5 <= (SELECT COUNT(*)
           FROM EMPLOYEE E3
           WHERE E3.WORKDEPT = E1.WORKDEPT)
```

Finally, only those employees whose level of education is greater than the average for that department are included:

```
SELECT LASTNAME, DEPTNAME, EDLEVEL
  FROM EMPLOYEE E1, DEPARTMENT
 WHERE E1.WORKDEPT = DEPARTMENT.DEPTNO
 AND EDLEVEL >
 (SELECT AVG(EDLEVEL)
  FROM EMPLOYEE E2
 WHERE E2.WORKDEPT = E1.WORKDEPT
 AND 5 <=
 (SELECT COUNT(*)
  FROM EMPLOYEE E3
 WHERE E3.WORKDEPT = E1.WORKDEPT))
```

This statement produces the following result:

LASTNAME	DEPTNAME	EDLEVEL
PIANKA	MANUFACTURING SYSTEMS	17
SCOUTTEN	MANUFACTURING SYSTEMS	17
JONES	MANUFACTURING SYSTEMS	17
LUTZ	MANUFACTURING SYSTEMS	18
PULASKI	ADMINISTRATION SYSTEMS	16
MARINO	ADMINISTRATION SYSTEMS	17
JOHNSON	ADMINISTRATION SYSTEMS	16
HENDERSON	OPERATIONS	16
SCHNEIDER	OPERATIONS	17

Chapter 6. Using Operators and Predicates in Queries

In DB2 Universal Database you can combine queries with different *set operators* and construct complex conditional statements with *quantified predicates*.

This chapter explains how to:

- Combine different tables with UNION, EXCEPT and INTERSECT set operators
- Construct complex conditions for queries with quantified predicates. Basic predicates were discussed briefly in “Selecting Rows” on page 20.

Combining Queries by Set Operators

The UNION, EXCEPT, and INTERSECT set operators enable you to combine two or more outer-level queries into a single query. Each query connected by these set operators is executed and the individual results are combined. Each operator produces a different result.

UNION Operator

The UNION operator derives a result table by combining two other result tables (for example TABLE1 and TABLE2) and eliminating any duplicate rows in the tables. When ALL is used with UNION (that is, UNION ALL), duplicate rows are not eliminated. In either case, each row of the derived table is a row from either TABLE1 or TABLE2.

In the following example of the UNION operator, the query returns the names of all persons that have a salary greater than \$21,000, or that have managerial responsibilities and have been working for less than 8 years:

1

```
SELECT ID, NAME FROM STAFF WHERE SALARY > 21000  
UNION
```

2

```
SELECT ID, NAME FROM STAFF WHERE JOB='Mgr' AND YEARS < 8  
ORDER BY ID
```

The results of the individual queries are:

1

ID	NAME
140	Fraye
160	Molinare
260	Jones

2

ID	NAME
10	Sanders
30	Marenghi
100	Plotz
140	Fraye
160	Molinare
240	Daniels

The database manager combines the results of both queries, eliminates the duplicates, and returns the final result in ascending order.

ID	NAME
10	Sanders
30	Marenghi
100	Plotz
140	Fraye
160	Molinare
240	Daniels
260	Jones

If you use the ORDER BY clause in a query with any set operator, you must write it after the last query. The system applies the ordering to the combined answer set.

If the column name in the two tables is different, the combined result table does not have names for the corresponding columns. Instead, the columns are numbered in the order in which they appear. So, if you want the result table to be ordered, you have to specify the column number in the ORDER BY clause.

EXCEPT Operator

The EXCEPT operator derives a result table by including all rows that are in TABLE1 but not in TABLE2, and eliminating all duplicate rows. When you use ALL with EXCEPT (EXCEPT ALL), the duplicate rows are not eliminated.

In the following example of the EXCEPT operator, the query returns the names of all persons that earn over \$21,000 but are not a manager and have been there for 8 or more years.

```

SELECT ID, NAME FROM STAFF WHERE SALARY > 21000
EXCEPT
SELECT ID, NAME FROM STAFF WHERE JOB='Mgr' AND YEARS < 8

```

The results of the individual queries are listed in the section on UNION. The above statement produces the following result:

```

ID      NAME
-----
260 Jones

```

INTERSECT operator

The INTERSECT operator derives a result table by including only rows that exist in both TABLE1 and TABLE2 and eliminating all duplicate rows. When you use ALL with INTERSECT (INTERSECT ALL), the duplicate rows are not eliminated.

In the following example of the INTERSECT operator, the query returns the name and ID of employees that earn more than \$21,000, have managerial responsibilities and have been working for fewer than 8 years.

```

SELECT ID, NAME FROM STAFF WHERE SALARY > 21000
INTERSECT
SELECT ID, NAME FROM STAFF WHERE JOB='Mgr' AND YEARS < 8

```

The result of the individual queries is listed in the section on UNION. The outcome of the two queries with INTERSECT is:

```

ID      NAME
-----
140 Fraye
160 Molinare

```

When using the UNION, EXCEPT, and INTERSECT operators, keep the following in mind:

- All corresponding items in the select-lists of the queries for the operators must be compatible. See the data type compatibility table in the *SQL Reference* for more information.
- An ORDER BY clause, if used, must be placed after the last query with a set operator. The column name can only be used in the ORDER BY clause if the column name is identical to the corresponding items in the select list of the queries for every operator.
- Operations between columns that have the same data type and the same length produce a column with that type and length. See rules for result data types in the *SQL Reference* for the results of the UNION, EXCEPT, and INTERSECT set operators.

Predicates

Predicates let you construct conditions so that only those rows that meet these conditions are processed. Basic predicates are discussed in “Selecting Rows” on page 20. IN, BETWEEN, LIKE, EXISTS and quantified predicates are discussed in this section.

Using the IN Predicate

Use the IN predicate to compare a value with several other values. For example:

```
SELECT NAME
FROM STAFF
WHERE DEPT IN (20, 15)
```

This example is equivalent to:

```
SELECT NAME
FROM STAFF
WHERE DEPT = 20 OR DEPT = 15
```

You can use the IN and NOT IN operators when a subquery returns a set of values. For example, the following query lists the surnames of employees responsible for projects MA2100 and OP2012:

```
SELECT LASTNAME
FROM EMPLOYEE
WHERE EMPNO IN
  (SELECT RESPEMP
   FROM PROJECT
   WHERE PROJNO = 'MA2100'
   OR PROJNO = 'OP2012')
```

The subquery is evaluated once, and the resulting list is substituted directly into the outer-level query. For example, if the subquery above selects employee numbers 10 and 330, the outer-level query is evaluated as if its WHERE clause were:

```
WHERE EMPNO IN (10, 330)
```

The list of values returned by the subquery can contain zero, one, or more values.

Using the BETWEEN Predicate

The BETWEEN predicate compares a single value to an inclusive range of values (named in the BETWEEN predicate).

The following example finds the names of employees who earn between \$10,000 and \$20,000:

```
SELECT LASTNAME
FROM EMPLOYEE
WHERE SALARY BETWEEN 10000 AND 20000
```

This is equivalent to:

```
SELECT LASTNAME
FROM EMPLOYEE
WHERE SALARY >= 10000 AND SALARY <= 20000
```

The next example finds the names of employees who earn less than \$10,000 or more than \$20,000:

```
SELECT LASTNAME
FROM EMPLOYEE
WHERE SALARY NOT BETWEEN 10000 AND 20000
```

Using the LIKE Predicate

Use the LIKE predicate to search for strings that have certain patterns. The pattern is specified through percentage signs and underscores.

- The underscore character (_) represents any single character.
- The percent sign (%) represents a string of zero or more characters.
- Any other character represents itself.

The following example selects employee names that are seven letters long and start with the letter 'S':

```
SELECT NAME
FROM STAFF
WHERE NAME LIKE 'S _ _ _ _ _ _ _'
```

The next example selects names of employees that do not start with the letter 'S':

```
SELECT NAME
FROM STAFF
WHERE NAME NOT LIKE 'S%'
```

Using the EXISTS Predicate

You can use a subquery to test for the *existence* of a row that satisfies some condition. In this case, the subquery is linked to the outer-level query by the predicate EXISTS or NOT EXISTS.

When you link a subquery to an outer query by an EXISTS predicate, the subquery does not return a value. Rather, the EXISTS predicate is true if the answer set of the subquery contains one or more rows, and false if it contains no rows.

The EXISTS predicate is often used with correlated subqueries. The example below lists the departments that currently have no entries in the PROJECT table:

```
SELECT DEPTNO, DEPTNAME
FROM DEPARTMENT X
WHERE NOT EXISTS
```

```

        (SELECT *
         FROM PROJECT
         WHERE DEPTNO = X.DEPTNO)
ORDER BY DEPTNO

```

You may connect the EXISTS and NOT EXISTS predicates to other predicates by using AND and OR in the WHERE clause of the outer-level query.

Quantified Predicates

A quantified predicate compares a value with a collection of values. If a fullselect returns more than one value, you must modify the comparison operators in your predicate by attaching the suffix ALL, ANY, or SOME. These suffixes determine how the set of values returned is to be treated in the outer-level predicate. The > comparison operator is used as an example (the remarks below apply to the other operators as well):

expression > ALL (fullselect)

The predicate is true if the expression is greater than each individual value returned by the fullselect. If the fullselect returns no values, the predicate is true. The result is false if the specified relationship is false for at least one value. Note that the <>ALL quantified predicate is equivalent to the NOT IN predicate.

The following example uses a subquery and a > ALL comparison to find the name and profession of all employees who earn more than all managers:

```

SELECT LASTNAME, JOB
FROM EMPLOYEE
WHERE SALARY > ALL
(SELECT SALARY
 FROM EMPLOYEE
 WHERE JOB='MANAGER')

```

expression > ANY (fullselect)

The predicate is true if the expression is greater than at least one of the values returned by the fullselect. If the fullselect returns no values, the predicate is false. Note that the =ANY quantified operator is equivalent to the IN predicate.

expression > SOME (fullselect)

SOME is synonymous with ANY.

For more information on predicates and operators, refer to the *SQL Reference*.

Chapter 7. Advanced SQL

This chapter covers several features of DB2 Universal Database that allow you to design queries more effectively, while customizing them to your needs. Topics in this chapter are based upon your thorough understanding of the material up to this point.

This chapter covers:

- Enforcing Business Rules with Constraints and Triggers
- Joins
- ROLLUP and CUBE Queries and Recursive Queries
- OLAP Functions

Enforcing Business Rules with Constraints and Triggers

In the business world, there is a need to make sure certain rules are always enforced. For example, an employee working on a project has to be on the payroll list. Or, perhaps we want certain events to happen automatically. For example, if a salesperson makes a sale, their commission should be increased.

DB2 Universal Database offers a useful suite of methods to this end:

- *Unique constraints* forbid duplicate values in one or more columns of a table.
- *Referential integrity constraints* ensure the data remains consistent across the specified tables.
- *Table check constraints* are rules that place restrictions on the values a column is allowed to have. Inserts and updates fail if a value being assigned to a column does not satisfy the check constraint(s) for that column.
- *Triggers* define a set of actions that are executed, or triggered, by a delete, insert, or update operation on a specified table. Triggers can be used for writing to other tables, for modifying input values, and for issuing alert messages.

The first section provides a conceptual overview of keys. Later, referential integrity, constraints, and triggers are explored through examples and diagrams.

Keys

A *key* is a set of columns that you can use to identify or access a particular row or rows.

A key composed of more than one column is called a *composite key*. In a table with a composite key, the ordering of the columns within the composite key does not necessarily correspond to their ordering within the table.

Unique Keys

A *unique key* is defined as a column (or set of columns) where no two values are the same. The columns of a unique key cannot contain null values. The constraint is enforced by the database manager during the execution of INSERT and UPDATE statements. A table can have multiple unique keys. Unique keys are optional and can be defined in CREATE TABLE or ALTER TABLE statements.

Primary Keys

A *primary key* is a unique key that is a part of the definition of the table. A table cannot have more than one primary key, and the columns of a primary key cannot contain null values. Primary keys are optional and can be defined in CREATE TABLE or ALTER TABLE statements.

Foreign Keys

A *foreign key* is specified in the definition of a referential constraint. A table can have zero or more foreign keys. The value of the composite foreign key is null if any component of the value is null. Foreign keys are optional and can be defined in CREATE TABLE statements or ALTER TABLE statements.

Unique Constraints

A unique constraint ensures that values of a key are unique within a table. Unique constraints are optional, and you can define them using the CREATE TABLE or ALTER TABLE statements by specifying the PRIMARY KEY or UNIQUE clause. For example, you can define a unique constraint on the employee number column of a table to ensure that every employee has a unique number.

Referential Integrity Constraints

By defining unique constraints and foreign keys you can define relationships between tables and consequently enforce certain business rules. The combination of unique key and foreign key constraints is commonly referred to as referential integrity constraints. A unique constraint referenced by a foreign key is called a *parent key*. A foreign key refers to or is related to a specific parent key. For example, a rule might state that every employee (EMPLOYEE table) must belong to an existing department (DEPARTMENT table). So, we define department number in the EMPLOYEE table as foreign key, and department number in the DEPARTMENT table as the primary key. The following diagram provides a visual description of referential integrity constraints.

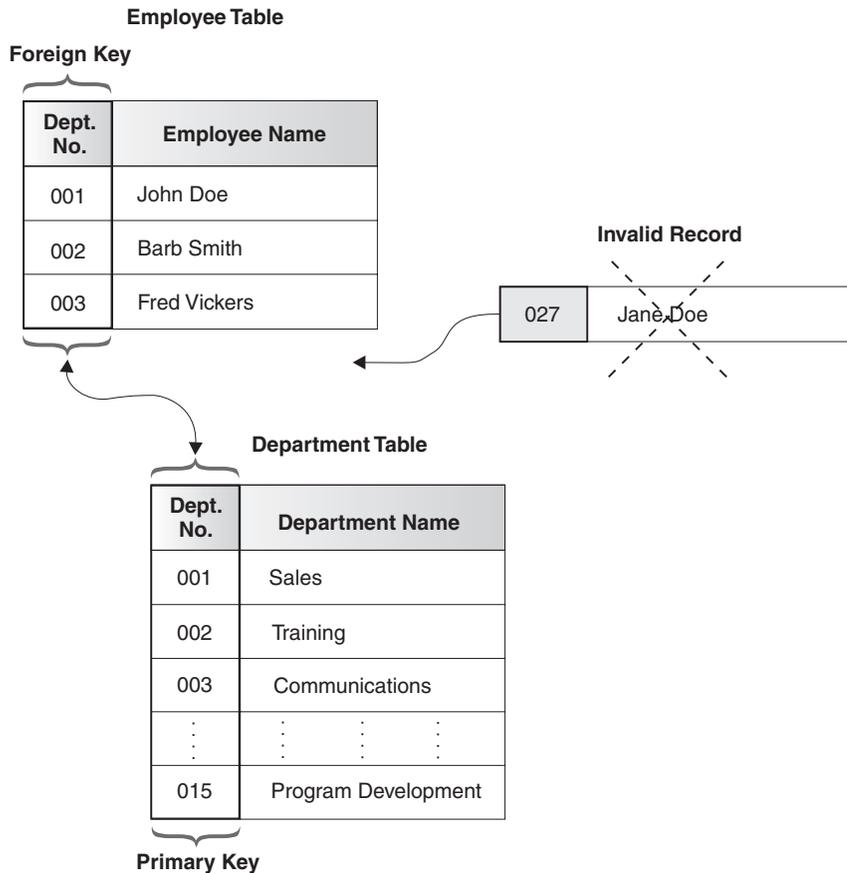


Figure 4. Foreign and Primary Constraints Define Relationships and Protect Data

Table Check Constraints

Table check constraints specify conditions that are evaluated for each row of a table. You can specify check constraints on individual columns. You can add them by using the CREATE or ALTER TABLE statements.

The following statement creates a table with the following constraints:

- The values of the department number must lie in the range 10 to 100
- The job of an employee can only be one of the following: "Sales", "Mgr", or "Clerk"
- Every employee who was hired prior to 1986 must make more than \$40,500.

```
CREATE TABLE EMP
  (ID          SMALLINT NOT NULL,
```

```

NAME          VARCHAR(9),
DEPT          SMALLINT CHECK (DEPT BETWEEN 10 AND 100),
JOB           CHAR(5) CHECK (JOB IN ('Sales', 'Mgr', 'Clerk')),
HIREDATE      DATE,
SALARY        DECIMAL(7,2),
COMM          DECIMAL(7,2),
PRIMARY KEY (ID),
CONSTRAINT YEARSAL CHECK
              (YEAR(HIREDATE) >= 1986 OR SALARY > 40500) )

```

A constraint is violated only if the condition evaluates to false. For example, if DEPT is NULL for an inserted row, the insert proceeds without error, even though values for DEPT should be between 10 and 100 as defined in the constraint.

The following statement adds a constraint to the EMPLOYEE table named COMP that an employee's total compensation must exceed \$15,000:

```

ALTER TABLE EMP
ADD CONSTRAINT COMP CHECK (SALARY + COMM > 15000)

```

The existing rows in the table will be checked to ensure that they do not violate the new constraint. You can defer this checking by using the SET CONSTRAINTS statement as follows:

```

SET CONSTRAINTS FOR EMP OFF
ALTER TABLE EMP ADD CONSTRAINT COMP CHECK (SALARY + COMM > 15000)
SET CONSTRAINTS FOR EMP IMMEDIATE CHECKED

```

First, the SET CONSTRAINTS statement is used to defer constraint checking for the table. Then one or more constraints can be added to the table without checking the constraints. Then the SET CONSTRAINTS statement is issued again to turn constraint checking back on and to perform any deferred constraint checking.

Triggers

A *trigger* defines a set of actions. Triggers are activated by operations that modify the data in a specified base table.

Some uses of triggers:

- to perform validation of input data
- to automatically generate a value for a newly inserted row
- to read from other tables for cross-referencing purposes
- to write to other tables for audit-trail purposes
- to support alerts through electronic mail messages

Using triggers results in faster application development, global enforcement of business rules, and easier maintenance of applications and data.

DB2 Universal Database supports several types of triggers. Triggers can be defined to be activated either before or after a DELETE, INSERT, or UPDATE operation. Each trigger includes a set of SQL statements called a *triggered action* that can include an optional search condition.

After triggers can be further defined to perform the triggered action either for each row or once for the statement. *Before triggers* always perform the triggered action for each row.

Use a trigger before an INSERT, UPDATE, or DELETE statement to check for certain conditions before performing a triggering operation or to change the input values before they are stored in the table.

Use an after trigger to propagate values as necessary or perform other tasks, such as sending a message, that may be required as a part of the trigger operation.

The following example illustrates one use of before and after triggers. Consider an application that records and tracks changes to stock prices. The database contains two tables, CURRENTQUOTE and QUOTEHISTORY defined as:

```
CREATE TABLE CURRENTQUOTE
(SYMBOL VARCHAR(10),
QUOTE DECIMAL(5,2),
STATUS VARCHAR(9))

CREATE TABLE QUOTEHISTORY
(SYMBOL VARCHAR(10),
QUOTE DECIMAL(5,2),
TIMESTAMP TIMESTAMP)
```

When the QUOTE column of CURRENTQUOTE is updated using a statement such as:

```
UPDATE CURRENTQUOTE
SET QUOTE = 68.5
WHERE SYMBOL = 'IBM'
```

The STATUS column of CURRENTQUOTE should be updated to reflect whether the stock is:

- Rising in value
- At a new high for the year
- Dropping in value
- At a new low for the year
- Steady in value.

This is done using the following before trigger:

1

```

CREATE TRIGGER STOCK_STATUS
NO CASCADE BEFORE UPDATE OF QUOTE ON CURRENTQUOTE
REFERENCING NEW AS NEWQUOTE OLD AS OLDQUOTE
FOR EACH ROW MODE DB2SQL

```

2

```

SET NEWQUOTE.STATUS =

```

3

```

CASE

```

4

```

    WHEN NEWQUOTE.QUOTE >=
        (SELECT MAX(QUOTE)
         FROM QUOTEHISTORY
         WHERE SYMBOL = NEWQUOTE.SYMBOL
          AND YEAR(TIMESTAMP) = YEAR(CURRENT DATE) )
    THEN 'High'

```

5

```

    WHEN NEWQUOTE.QUOTE <=
        (SELECT MIN(QUOTE)
         FROM QUOTEHISTORY
         WHERE SYMBOL = NEWQUOTE.SYMBOL
          AND YEAR(TIMESTAMP) = YEAR(CURRENT DATE) )
    THEN 'Low'

```

6

```

    WHEN NEWQUOTE.QUOTE > OLDQUOTE.QUOTE
    THEN 'Rising'
    WHEN NEWQUOTE.QUOTE < OLDQUOTE.QUOTE
    THEN 'Dropping'
    WHEN NEWQUOTE.QUOTE = OLDQUOTE.QUOTE
    THEN 'Steady'
END

```

1

This block of code defines `STOCK_STATUS` as a trigger that should be activated before the update of the `QUOTE` column of the `CURRENTQUOTE` table. The second line specifies that the triggered action is to be applied before any changes caused by the actual update of the `CURRENTQUOTE` table are applied to the database. The `NO CASCADE` clause means that the triggered action will not cause any other triggers to be activated. The third line specifies the names that must be used as qualifiers of the column name for the new values (`NEWQUOTE`) and the old values (`OLDQUOTE`). Column names qualified with these correlation names (`NEWQUOTE` and `OLDQUOTE`) are called *transition variables*. The fourth line indicates that the triggered action should be executed for each row.

- 2** This marks the start of the first and only SQL statement in the triggered action of this trigger. The SET transition-variable statement is used in a trigger to assign a value to a column in the row of the table that is being updated by the statement that activated the trigger. This statement is assigning a value to the STATUS column of the CURRENTQUOTE table.
- 3** The expression that is used on the right hand side of the assignment is a CASE expression. The CASE expression extends to the END keyword.
- 4** The first case checks to see if the new quote (NEWQUOTE.QUOTE) exceeds the maximum value for the stock symbol in the current calendar year. The subquery is using the QUOTEHISTORY table that is updated by the after trigger that follows.
- 5** The second case checks to see if the new quote (NEWQUOTE.QUOTE) is less than the minimum value for the stock symbol in the current calendar year. The subquery is using the QUOTEHISTORY table that is updated by the after trigger that follows.
- 6** The last three cases compare the new quote (NEWQUOTE.QUOTE) to the quote that was in the table (OLDQUOTE.QUOTE) to determine if it is greater, less or the same. The SET transition-variable statement ends here.

In addition to updating the entry in the CURRENTQUOTE table, an audit record needs to be created by copying the new quote, with a timestamp, to the QUOTEHISTORY table. This is done using the following after trigger:

1

```
CREATE TRIGGER RECORD_HISTORY  
AFTER UPDATE OF QUOTE ON CURRENTQUOTE  
REFERENCING NEW AS NEWQUOTE  
FOR EACH ROW MODE DB2SQL  
BEGIN ATOMIC
```

2

```
INSERT INTO QUOTEHISTORY  
VALUES (NEWQUOTE.SYMBOL, NEWQUOTE.QUOTE, CURRENT TIMESTAMP);  
END
```

1

This block of code defines a trigger named RECORD_HISTORY as a trigger that should be activated after the update of the QUOTE column of the CURRENTQUOTE table. The third line specifies the name that should be used as a qualifier of the column name for the new value (NEWQUOTE). The fourth line indicates that the triggered action should be executed for each row.

- 2** The triggered action of this trigger includes a single SQL statement that inserts a row into the QUOTEHISTORY table using the data from the row that has been updated (NEWQUOTE.SYMBOL and NEWQUOTE.QUOTE) and the current timestamp.

CURRENT_TIMESTAMP is a special register containing the timestamp. A list and explanation is provided in “Special Registers” on page 68.

Joins

The process of combining data from two or more tables is called joining tables. The database manager forms all combinations of rows from the specified tables. For each combination, it tests the *join condition*. A join condition is a search condition, with some restrictions. For a list of restrictions refer to the *SQL Reference*.

Note that the data types of the columns involved in the join condition do not have to be identical; however, they must be compatible. The join condition is evaluated the same way as any other search condition, and the same rules for comparisons apply.

If you do not specify a join condition, all combinations of rows from tables listed in the FROM clause are returned, even though the rows may be completely unrelated. The result is referred to as the *cross product* of the two tables.

Examples in this section are based on the next two tables. They are simplifications of the tables from the sample database but do not exist in the sample database. They are used to outline interesting points about joins in general. SAMP_STAFF lists the name of employees who are not employed as contractors and their job descriptions, while SAMP_PROJECT lists the name of employees (contract and full-time) and the projects that they are working on.

The tables are as follows:

NAME	PROJ
Haas	AD3100
Thompson	PL2100
Walker	MA2112
Lutz	MA2111

Figure 5. SAMP_PROJECT TABLE

NAME	JOB
Haas	PRES
Thompson	MANAGER
Lucchessi	SALESREP
Nicholls	ANALYST

Figure 6. SAMP_STAFF TABLE

The following example produces the cross product of the two tables. A join condition is not specified, so every combination of rows is present:

```

SELECT SAMP_PROJECT.NAME,
       SAMP_PROJECT.PROJ, SAMP_STAFF.NAME, SAMP_STAFF.JOB
FROM SAMP_PROJECT, SAMP_STAFF

```

This statement produces the following result:

```

NAME      PROJ  NAME      JOB
-----
Haas      AD3100 Haas      PRES
Thompson  PL2100 Haas      PRES
Walker    MA2112 Haas      PRES
Lutz      MA2111 Haas      PRES
Haas      AD3100 Thompson  MANAGER
Thompson  PL2100 Thompson  MANAGER
Walker    MA2112 Thompson  MANAGER
Lutz      MA2111 Thompson  MANAGER
Haas      AD3100 Lucchessi SALESREP
Thompson  PL2100 Lucchessi SALESREP
Walker    MA2112 Lucchessi SALESREP
Lutz      MA2111 Lucchessi SALESREP
Haas      AD3100 Nicholls  ANALYST
Thompson  PL2100 Nicholls  ANALYST
Walker    MA2112 Nicholls  ANALYST
Lutz      MA2111 Nicholls  ANALYST

```

The two main types of joins are *inner joins* and *outer joins*. So far, in all of our examples we have used the inner join. Inner joins keep only the rows from the cross product that meet the join condition. If a row exists in one table, but not the other, the information is not included in the result table.

The following example produces the inner join of the two tables. The inner join lists the full-time employees who are assigned to a project :

```
SELECT SAMP_PROJECT.NAME,
       SAMP_PROJECT.PROJ, SAMP_STAFF.NAME, SAMP_STAFF.JOB
FROM SAMP_PROJECT, SAMP_STAFF
WHERE SAMP_STAFF.NAME = SAMP_PROJECT.NAME
```

Alternately, you can specify the inner join as follows:

```
SELECT SAMP_PROJECT.NAME,
       SAMP_PROJECT.PROJ, SAMP_STAFF.NAME, SAMP_STAFF.JOB
FROM SAMP_PROJECT INNER JOIN SAMP_STAFF
ON SAMP_STAFF.NAME = SAMP_PROJECT.NAME
```

The result is:

NAME	PROJ	NAME	JOB
-----	-----	-----	-----
Haas	AD3100	Haas	PRES
Thompson	PL2100	Thompson	MANAGER

Note that the result of the inner join consists of rows that have matching values for the NAME column in the right and the left tables - both 'Haas' and 'Thompson' are included in the SAMP_STAFF table that lists all full-time employees and in the SAMP_PROJECT table that lists full-time and contract employees assigned to a project.

Outer joins are a concatenation of the inner join and rows from the left table, right table, or both tables that are missing from the inner join. When you perform an outer join on two tables, you arbitrarily assign one table as the left table and the other one as the right table. There are three types of outer joins:

1. *left outer join* includes the inner join and the rows from the left table that are not included in the inner join.
2. *right outer join* includes the inner join and the rows from the right table that are not included in the inner join.
3. *full outer join* includes the inner join and the rows from both the left and right tables that are not included in the inner join.

Use the SELECT statement to specify the columns to be displayed. In the FROM clause, list the name of the first table followed by the keywords LEFT OUTER JOIN, RIGHT OUTER JOIN or FULL OUTER JOIN. Next you need to

specify the second table followed by the ON keyword. Following the ON keyword, specify the join condition to express a relationship between the tables to be joined.

In the following example, SAMP_STAFF is designated as the right table and SAMP_PROJECT as the left table. By using LEFT OUTER JOIN, we list the name and project number of all employees, full-time and contract, (listed in SAMP_PROJECT) and their job title, if they are a full-time employee (listed in SAMP_STAFF):

```
SELECT SAMP_PROJECT.NAME, SAMP_PROJECT.PROJ,
       SAMP_STAFF.NAME, SAMP_STAFF.JOB
FROM SAMP_PROJECT LEFT OUTER JOIN SAMP_STAFF
ON SAMP_STAFF.NAME = SAMP_PROJECT.NAME
```

This statement produces the following result:

NAME	PROJ	NAME	JOB
Haas	AD3100	Haas	PRES
Lutz	MA2111	-	-
Thompson	PL2100	Thompson	MANAGER
Walker	MA2112	-	-

Rows with values in all columns are the result of the inner join. These are rows that satisfy the join condition: 'Haas' and 'Thompson' are listed in both SAMP_PROJECT (left table) and SAMP_STAFF (right table). For rows that the join condition was not satisfied, the null value appears on columns of the right table: 'Lutz' and 'Walker' are contract employees listed in the SAMP_PROJECT table and not in the SAMP_STAFF table. Note that all rows from the left table are included in the result set.

In the next example, SAMP_STAFF is designated as the right table and SAMP_PROJECT as the left table. By using RIGHT OUTER JOIN we list the name and job title of all full-time employees (listed in SAMP_STAFF) and their project number, if they are assigned to one (listed in SAMP_PROJECT):

```
SELECT SAMP_PROJECT.NAME,
       SAMP_PROJECT.PROJ, SAMP_STAFF.NAME, SAMP_STAFF.JOB
FROM SAMP_PROJECT RIGHT OUTER JOIN SAMP_STAFF
ON SAMP_STAFF.NAME = SAMP_PROJECT.NAME
```

The result is:

NAME	PROJ	NAME	JOB
Haas	AD3100	Haas	PRES
-	-	Lucchessi	SALESREP
-	-	Nicholls	ANALYST
Thompson	PL2100	Thompson	MANAGER

As in the left outer join, rows with values in all columns are the result of the inner join. These are rows that satisfy the join condition: 'Haas' and 'Thompson' are listed in both SAMP_PROJECT (left table) and SAMP_STAFF (right table). For rows that the join condition was not satisfied, the null value appears on columns of the right table: 'Lucchessi' and 'Nicholls' are full-time employees that are not assigned to a project. While they are listed in SAMP_STAFF, they are not in SAMP_PROJECT. Note that all rows from the right table are included in the result set.

The next example uses FULL OUTER JOIN with the SAMP_PROJECT and SAMP_STAFF tables. It lists the name of all full-time employees, including the ones that are not assigned to a project, and contract employees:

```
SELECT SAMP_PROJECT.NAME, SAMP_PROJECT.PROJ,
       SAMP_STAFF.NAME, SAMP_STAFF.JOB
FROM SAMP_PROJECT FULL OUTER JOIN SAMP_STAFF
ON SAMP_STAFF.NAME = SAMP_PROJECT.NAME
```

The result is:

NAME	PROJ	NAME	JOB
Haas	AD3100	Haas	PRES
-	-	Lucchessi	SALESREP
-	-	Nicholls	ANALYST
Thompson	PL2100	Thompson	MANAGER
Lutz	MA2111	-	-
Walker	MA2112	-	-

This result includes the left outer join, the right outer join and the inner join. All full-time and contract employees are listed. Just like left outer join and right outer join, for values where the join condition was not satisfied, the null value appears in the respective column. Every row from SAMP_STAFF and SAMP_PROJECT is included in the result set.

Complex Queries

DB2 Universal Database allows you to group, consolidate, and view multiple columns in a single result set through the use of ROLLUP and CUBE. This new and powerful capability enhances and simplifies SQL based data analysis.

There are various methods of extracting useful information from the database. You can implement recursive queries to produce result tables from existing data sets.

ROLLUP and CUBE Queries

You specify ROLLUP and CUBE operations in the GROUP BY clause of a query.

ROLLUP grouping produces a result set containing the regular grouped rows and *sub-total rows*. CUBE grouping produces a result set containing the rows from ROLLUP and cross-tabulation rows.

So for ROLLUP, you could get the sales by person by month with monthly sales totals and an overall total. For CUBE, additional rows would be included for total sales by person.

See the *SQL Reference* for further details.

Recursive Queries

A *recursive query* is a query that iteratively uses result data to determine further results. You might think of this as traversing a tree or a graph.

Practical examples include reservation systems, network planning and scheduling.

A recursive query is written using a common table expression that includes a reference to its own name.

See the *SQL Reference* for examples of recursive queries.

OLAP Functions

OnLine Analytical Processing (OLAP) functions perform a column function operation over a *window* of data. This window may specify a partitioning of rows, an ordering of rows within partitions, or an *aggregation group*. The aggregation group allows the user to specify which rows, relative to the current row, participate in the calculation. The use of such a window allows operations like cumulative sums and moving averages.

In addition to allowing the user to specify a window for existing column functions (such as SUM and AVG), OLAP functions can perform ranking (RANK and DENSE_RANK) operations, and provide row numbering (ROW_NUMBER), given a specific partitioning and ordering of rows.

The following example query gives an employee's rank within the department, based on salary, and shows the cumulative sum of the salaries within the department (for departments 15 and 38):

```
SELECT NAME, DEPT,  
       RANK () OVER (PARTITION BY DEPT ORDER BY SALARY DESC) AS RANK,  
       SUM (SALARY) OVER (PARTITION BY DEPT  
                          ORDER BY SALARY DESC  
                          ROWS BETWEEN UNBOUNDED PRECEDING AND CURRENT ROW)
```

```
        AS CUMULATIVE_SUM
FROM STAFF
WHERE DEPT IN (15,38)
ORDER BY DEPT, RANK
```

This statement produces the following result:

NAME	DEPT	RANK	CUMULATIVE_SUM
Hanes	15	1	20659.80
Rothman	15	2	37162.63
Ngan	15	3	49670.83
Kermisch	15	4	61929.33
O'Brien	38	1	18006.00
Marenghi	38	2	35512.75
Quigley	38	3	52321.05
Naughton	38	4	65275.80
Abrahams	38	5	77285.55

Chapter 8. Customizing and Enhancing Data Manipulation

This chapter gives a brief introduction to *object-oriented extensions* in DB2 Universal Database. There are many advantages to using object oriented extensions. *User-defined Types (UDT)* increase the set of data types available to your applications, while *User-defined Functions (UDF)* allow for creation of application specific functions. UDFs act as *methods* for UDTs by providing consistent behavior and encapsulation of the types.

Special registers and *system catalogs* are discussed next. Special registers are storage areas defined by the database manager; they are used to store information that SQL statements can reference. Special registers are established at connection time and are specific to the processing of that application. The system catalogs contain information about the logical and the physical structure of database objects.

This chapter covers:

- User-Defined Types
- User-Defined Functions
- Large Objects (LOBs)
- Special Registers
- Introduction to Catalog Views

A detailed discussion of the above topics is beyond the scope of this book but is presented in the *SQL Reference* and the *Administration Guide*.

User-Defined Types

A *distinct type* is a user-defined data type that shares its internal representation with an existing type (its “source” type), but is considered to be separate and incompatible for most operations. For example, you might want to define an age type, a weight type, and a height type, all of which have quite different semantics, but which use the built-in data type INTEGER for their internal representations.

The following example illustrates the creation of a distinct type named PAY:

```
CREATE DISTINCT TYPE PAY AS DECIMAL(9,2) WITH COMPARISONS
```

Although PAY has the same representation as the built-in data type DECIMAL(9,2), it is considered to be a separate type that is not comparable to DECIMAL(9,2) or to any other type. It is comparable only to the same distinct

type. Also, operators and functions that would work on DECIMAL will not apply here. For example, a value with PAY data type cannot be multiplied with a value of INTEGER data type. Therefore, you have to write functions that only apply to the PAY data type.

Using distinct data types limits accidental mistakes. For instance, if the SALARY column of table EMPLOYEE was defined as a PAY data type, it could not be added to COMM even though their sourced types are the same.

Distinct data types support casting. A source type can be cast to a distinct data type, and a distinct data type to a source type. For example, if the SALARY column of the table EMPLOYEE were defined as a PAY data type, the following example would not fail at the comparison operator.

```
SELECT * FROM EMPLOYEE
WHERE DECIMAL(SALARY) = 41250
```

DECIMAL(SALARY) returns a decimal data type. Inversely, a numeric data type can be cast to a PAY type. For example, you can cast the number 41250 by using PAY(41250).

User-Defined Functions

As mentioned in “Using Functions” on page 28, DB2 Universal Database provides built-in and user-defined functions (UDF). However, this set of functions will never satisfy all requirements. Often, you need to create customized functions for particular tasks. User-defined functions allow you to create customized functions.

There are four types of user-defined functions: *sourced* (or *template*), *external scalar*, *external table*, and *OLE DB external table*.

This section covers sourced and external scalar types. For more information regarding external table and OLE DB table types, see the *SQL Reference*.

Sourced user-defined functions allow for user-defined types to selectively reference another built-in or user-defined function that is already known to the database. You can use both scalar and column functions.

In the next example, a user-defined function (called MAX) is created that is based on the built-in MAX column function, which takes a DECIMAL data type as input. The MAX UDF takes a PAY type as input and returns a PAY type as output.

```
CREATE FUNCTION MAX(PAY) RETURNS PAY
SOURCE MAX(DECIMAL)
```

External user-defined functions are written by users in a programming language. There are *external scalar functions* and *external table functions* and both are discussed in the *SQL Reference*.

As another example, assuming that you have already written a function that counts the number of words in a string, you can register it with the database using the CREATE FUNCTION statement with the name WORDCOUNT. This function can then be used in SQL statements.

The following statement returns employee numbers and the number of words in the ASCII form of their resumes. WORDCOUNT is an external scalar function that has been registered with the database by the user and is now being used in the statement.

```
SELECT EMPNO, WORDCOUNT(RESUME)
FROM EMP_RESUME
WHERE RESUME_FORMAT = 'ascii'
```

For more detailed information on writing user-defined functions, refer to the *Application Development Guide*.

Large Objects (LOBs)

The term *large object* and its acronym *LOB* are used to refer to three data types: BLOB, CLOB, or DBCLOB. These types can contain large amounts of data, for objects such as audio, photos and documents.

A *Binary Large Object (BLOB)* is a varying-length string, measured in bytes, that can be up to 2 gigabytes long. A BLOB is primarily intended to hold nontraditional data such as pictures, voice, and mixed media.

A *Character Large Object (CLOB)* is a varying-length string, measured in bytes, that can be up to 2 gigabytes long. A CLOB is used to store large single-byte character set data such as documents. A CLOB is considered to be a character string.

A *Double-Byte Character Large Object (DBCLOB)* is a varying-length string of double-byte characters that can be up to 2 gigabytes long (1 073 741 823 double-byte characters). A DBCLOB is used to store large double-byte character set data such as documents. A DBCLOB is considered to be a graphic string.

Manipulating Large Objects (LOBs)

Since LOB values can be very large, transferring them from the database server to client application program can be time consuming. However, typically LOB values are processed one piece at a time, rather than as a

whole. For those cases where an application does not need (or want) the entire LOB value to be stored in application memory, it can reference this value via a *large object locator* variable.

Subsequent statements can then use the locators to perform operations on the data without necessarily retrieving the entire large object. Locator variables are used to reduce the storage requirements for the applications, and improve the performance by reducing the flow of data between the client and the server.

Another mechanism is *file reference variables*. They are used to retrieve a large object directly to a file or to update a large object in a table directly from a file. File reference variables are used to reduce the storage requirements for the applications since they do not need to store the large object data. For more information refer to the *Application Development Guide* and the *SQL Reference*.

Special Registers

A *special register* is a storage area that is defined for a connection by the database manager and is used to store information that can be referenced in SQL statements. Following are a few examples of the more commonly used special registers. For a list of all the special registers and more detailed information refer to the *SQL Reference*.

- **CURRENT DATE:** Holds the date according to the time-of-day clock at SQL statement execution time.
- **CURRENT FUNCTION PATH:** Holds a value that specifies the function path used to resolve function and data type references.
- **CURRENT SERVER:** Specifies the current application server.
- **CURRENT TIME:** Holds the time according to the time-of-day clock at the SQL statement execution time.
- **CURRENT TIMESTAMP:** Specifies a timestamp according to the time-of-day clock at SQL statement execution time.
- **CURRENT TIMEZONE:** Specifies the difference between Coordinated Universal Time and local time at the application server.
- **USER:** Specifies the run-time authorization ID.

You can display the contents of a special register with the **VALUES** statement. For example:

```
VALUES (CURRENT_TIMESTAMP)
```

You could also use:

```
SELECT CURRENT_TIMESTAMP FROM ORG
```

and this will return the **TIMESTAMP** for every row entry in the table.

Introduction to Catalog Views

DB2 creates and maintains an extensive set of system catalog tables for each database. These tables contain information about the logical and physical structure of database objects such as tables, views, packages, referential integrity relationships, functions, distinct types, and triggers. They are created when the database is created, and are updated in the course of normal operation. You cannot explicitly create or drop them, but you can query and view their contents.

For more information, refer to the *SQL Reference*.

Selecting Rows from System Catalogs

The catalog views are like any other database view. You can use SQL statements to look at the data, exactly in the same way that you would for any other view in the system.

You can find very useful information about tables in the SYSCAT.TABLES catalog. To find the names of existing tables that you have created, issue a statement similar to the following:

```
SELECT TABNAME, TYPE, CREATE_TIME
FROM SYSCAT.TABLES
WHERE DEFINER = USER
```

This statement produces the following result:

TABNAME	TYPE	CREATE_TIME
ORG	T	1999-07-21-13.42.55.128005
STAFF	T	1999-07-21-13.42.55.609001
DEPARTMENT	T	1999-07-21-13.42.56.069001
EMPLOYEE	T	1999-07-21-13.42.56.310001
EMP_ACT	T	1999-07-21-13.42.56.710001
PROJECT	T	1999-07-21-13.42.57.051001
EMP_PHOTO	T	1999-07-21-13.42.57.361001
EMP_RESUME	T	1999-07-21-13.42.59.154001
SALES	T	1999-07-21-13.42.59.855001
CL_SCHED	T	1999-07-21-13.43.00.025002
IN_TRAY	T	1999-07-21-13.43.00.055001

The following list includes catalog views pertaining to subjects discussed in this book. There are many other catalog views, and they are listed in detail in the *SQL Reference* and *Administration Guide* manuals.

Description	Catalog View
check constraints	SYSCAT.CHECKS
columns	SYSCAT.COLUMNS
columns referenced by check constraints	SYSCAT.COLCHECKS

Description	Catalog View
columns used in keys	SYSCAT.KEYCOLUSE
datatypes	SYSCAT.DATATYPES
function parameters or result of a function	SYSCAT.FUNCPARMS
referential constraints	SYSCAT.REFERENCES
schemas	SYSCAT.SCHEMATA
table constraints	SYSCAT.TABCONST
tables	SYSCAT.TABLES
triggers	SYSCAT.TRIGGERS
user-defined functions	SYSCAT.FUNCTIONS
views	SYSCAT.VIEWS

Appendix A. Sample Database Tables

This appendix shows the information contained in the sample tables of the sample database SAMPLE, and how to create and remove them.

Additional sample databases are provided with DB2 Universal Database to demonstrate business intelligence functions, and are used in the business intelligence tutorial. However, only the contents of the sample database SAMPLE are described in this appendix. Refer to the *Data Warehouse Center Administration Guide* for more information about the business intelligence sample databases.

The sample tables are used in the examples that appear in this manual and other manuals in this library. In addition, the data contained in the sample files with BLOB and CLOB data types is shown.

The following sections are included in this appendix:

- "The Sample Database" on page 72
- "To Create the Sample Database" on page 72
- "To Erase the Sample Database" on page 72
- "CL_SCHED Table" on page 72
- "DEPARTMENT Table" on page 73
- "EMPLOYEE Table" on page 73
- "EMP_ACT Table" on page 76
- "EMP_PHOTO Table" on page 78
- "EMP_RESUME Table" on page 78
- "IN_TRAY Table" on page 79
- "ORG Table" on page 79
- "PROJECT Table" on page 80
- "SALES Table" on page 81
- "STAFF Table" on page 82
- "STAFFG Table" on page 83
- "Sample Files with BLOB and CLOB Data Type" on page 84
- "Quintana Photo" on page 84
- "Quintana Resume" on page 84
- "Nicholls Photo" on page 85
- "Nicholls Resume" on page 86
- "Adamson Photo" on page 87
- "Adamson Resume" on page 87
- "Walker Photo" on page 88
- "Walker Resume" on page 89.

In the sample tables, a dash (-) indicates a null value.

Sample Database Tables

The Sample Database

The examples in this book use a sample database. To use these examples, you must create the SAMPLE database. To use it, the database manager must be installed.

To Create the Sample Database

An executable file creates the sample database.² To create a database you must have SYSADM authority.

- **When Using UNIX-based platforms**

If you are using the operating system command prompt, type:

```
sql1lib/bin/db2samp1 <path>
```

from the home directory of the database manager instance owner, where *path* is an optional parameter specifying the path where the sample database is to be created. Press Enter.³ The schema for DB2SAMPL is the CURRENT SCHEMA special register value.

- **When using OS/2 or Windows platforms**

If you are using the operating system command prompt, type:

```
db2samp1 e
```

where *e* is an optional parameter specifying the drive where the database is to be created. Press Enter.⁴

If you are not logged on to your workstation through User Profile Management, you will be prompted to do so.

To Erase the Sample Database

If you do not need to access the sample database, you can erase it by using the DROP DATABASE command:

```
db2 drop database sample
```

CL_SCHED Table

Name:	CLASS_CODE	DAY	STARTING	ENDING
Type:	char(7)	smallint	time	time
Desc:	Class Code (room:teacher)	Day # of 4 day schedule	Class Start Time	Class End Time

2. For information related to this command, see the DB2SAMPL command in the *Command Reference*.

3. If the path parameter is not specified, the sample database is created in the default path specified by the DFTDBPATH parameter in the database manager configuration file.

4. If the drive parameter is not specified, the sample database is created on the same drive as DB2.

DEPARTMENT Table

Name:	DEPTNO	DEPTNAME	MGRNO	ADMRDEPT	LOCATION
Type:	char(3) not null	varchar(29) not null	char(6)	char(3) not null	char(16)
Desc:	Department number	Name describing general activities of department	Employee number (EMPNO) of department manager	Department (DEPTNO) to which this department reports	Name of the remote location
Values:	A00	SPIFFY COMPUTER SERVICE DIV.	000010	A00	-
	B01	PLANNING	000020	A00	-
	C01	INFORMATION CENTER	000030	A00	-
	D01	DEVELOPMENT CENTER	-	A00	-
	D11	MANUFACTURING SYSTEMS	000060	D01	-
	D21	ADMINISTRATION SYSTEMS	000070	D01	-
	E01	SUPPORT SERVICES	000050	A00	-
	E11	OPERATIONS	000090	E01	-
	E21	SOFTWARE SUPPORT	000100	E01	-

EMPLOYEE Table

Names:	EMPNO	FIRSTNME	MIDINIT	LASTNAME	WORKDEPT	PHONENO	HIREDATE
Type:	char(6) not null	varchar(12) not null	char(1) not null	varchar(15) not null	char(3)	char(4)	date
Desc:	Employee number	First name	Middle initial	Last name	Department (DEPTNO) in which the employee works	Phone number	Date of hire
JOB	EDLEVEL	SEX	BIRTHDATE	SALARY	BONUS	COMM	
char(8)	smallint not null	char(1)	date	dec(9,2)	dec(9,2)	dec(9,2)	
Job	Number of years of formal education	Sex (M male, F female)	Date of birth	Yearly salary	Yearly bonus	Yearly commission	

See the following page for the values in the EMPLOYEE table.

Sample Database Tables

EMPNO	FIRSTNAME	MID INIT	LASTNAME	WORK DEPT	PHONE NO	HIREDATE	JOB	ED LEVEL	SEX	BIRTHDATE	SALARY	BONUS	COMM
char(6) not null	varchar(12) not null	char(1) not null	varchar(15) not null	char(3)	char(4)	date	char(8)	smallint not null	char(1)	date	dec(9,2)	dec(9,2)	dec(9,2)
000010	CHRISTINE	I	HAAS	A00	3978	1965-01-01	PRES	18	F	1933-08-24	52750	1000	4220
000020	MICHAEL	L	THOMPSON	B01	3476	1973-10-10	MANAGER	18	M	1948-02-02	41250	800	3300
000030	SALLY	A	KWAN	C01	4738	1975-04-05	MANAGER	20	F	1941-05-11	38250	800	3060
000050	JOHN	B	GEYER	E01	6789	1949-08-17	MANAGER	16	M	1925-09-15	40175	800	3214
000060	IRVING	F	STERN	D11	6423	1973-09-14	MANAGER	16	M	1945-07-07	32250	500	2580
000070	EVA	D	PULASKI	D21	7831	1980-09-30	MANAGER	16	F	1953-05-26	36170	700	2893
000090	EILEEN	W	HENDERSON	E11	5498	1970-08-15	MANAGER	16	F	1941-05-15	29750	600	2380
000100	THEODORE	Q	SPENSER	E21	0972	1980-06-19	MANAGER	14	M	1956-12-18	26150	500	2092
000110	VINCENZO	G	LUCCHESI	A00	3490	1958-05-16	SALESREP	19	M	1929-11-05	46500	900	3720
000120	SEAN		O'CONNELL	A00	2167	1963-12-05	CLERK	14	M	1942-10-18	29250	600	2340
000130	DOLORES	M	QUINTANA	C01	4578	1971-07-28	ANALYST	16	F	1925-09-15	23800	500	1904
000140	HEATHER	A	NICHOLLS	C01	1793	1976-12-15	ANALYST	18	F	1946-01-19	28420	600	2274
000150	BRUCE		ADAMSON	D11	4510	1972-02-12	DESIGNER	16	M	1947-05-17	25280	500	2022
000160	ELIZABETH	R	PIANKA	D11	3782	1977-10-11	DESIGNER	17	F	1955-04-12	22250	400	1780
000170	MASATOSHI	J	YOSHIMURA	D11	2890	1978-09-15	DESIGNER	16	M	1951-01-05	24680	500	1974
000180	MARILYN	S	SCOUTTEN	D11	1682	1973-07-07	DESIGNER	17	F	1949-02-21	21340	500	1707
000190	JAMES	H	WALKER	D11	2986	1974-07-26	DESIGNER	16	M	1952-06-25	20450	400	1636
000200	DAVID		BROWN	D11	4501	1966-03-03	DESIGNER	16	M	1941-05-29	27740	600	2217
000210	WILLIAM	T	JONES	D11	0942	1979-04-11	DESIGNER	17	M	1953-02-23	18270	400	1462
000220	JENNIFER	K	LUTZ	D11	0672	1968-08-29	DESIGNER	18	F	1948-03-19	29840	600	2387
000230	JAMES	J	JEFFERSON	D21	2094	1966-11-21	CLERK	14	M	1935-05-30	22180	400	1774
000240	SALVATORE	M	MARINO	D21	3780	1979-12-05	CLERK	17	M	1954-03-31	28760	600	2301
000250	DANIEL	S	SMITH	D21	0961	1969-10-30	CLERK	15	M	1939-11-12	19180	400	1534
000260	SYBIL	P	JOHNSON	D21	8953	1975-09-11	CLERK	16	F	1936-10-05	17250	300	1380
000270	MARIA	L	PEREZ	D21	9001	1980-09-30	CLERK	15	F	1953-05-26	27380	500	2190
000280	ETHEL	R	SCHNEIDER	E11	8997	1967-03-24	OPERATOR	17	F	1936-03-28	26250	500	2100
000290	JOHN	R	PARKER	E11	4502	1980-05-30	OPERATOR	12	M	1946-07-09	15340	300	1227
000300	PHILIP	X	SMITH	E11	2095	1972-06-19	OPERATOR	14	M	1936-10-27	17750	400	1420
000310	MAUDE	F	SETRIGHT	E11	3332	1964-09-12	OPERATOR	12	F	1931-04-21	15900	300	1272
000320	RAMLAL	V	MEHTA	E21	9990	1965-07-07	FIELDREP	16	M	1932-08-11	19950	400	1596

EMPNO	FIRSTNAME	MID INIT	LASTNAME	WORK DEPT	PHONE NO	HIREDATE	JOB	ED LEVEL	SEX	BIRTHDATE	SALARY	BONUS	COMM
000330	WING		LEE	E21	2103	1976-02-23	FIELDREP	14	M	1941-07-18	25370	500	2030
000340	JASON	R	GOUNOT	E21	5698	1947-05-05	FIELDREP	16	M	1926-05-17	23840	500	1907

Sample Database Tables

EMP_ACT Table

Name:	EMPNO	PROJNO	ACTNO	EMPTIME	EMSTDATE	EMENDATE
Type:	char(6) not null	char(6) not null	smallint not null	dec(5,2)	date	date
Desc:	Employee number	Project number	Activity number	Proportion of employee's time spent on project	Date activity starts	Date activity ends
Values:	000010	AD3100	10	.50	1982-01-01	1982-07-01
	000070	AD3110	10	1.00	1982-01-01	1983-02-01
	000230	AD3111	60	1.00	1982-01-01	1982-03-15
	000230	AD3111	60	.50	1982-03-15	1982-04-15
	000230	AD3111	70	.50	1982-03-15	1982-10-15
	000230	AD3111	80	.50	1982-04-15	1982-10-15
	000230	AD3111	180	1.00	1982-10-15	1983-01-01
	000240	AD3111	70	1.00	1982-02-15	1982-09-15
	000240	AD3111	80	1.00	1982-09-15	1983-01-01
	000250	AD3112	60	1.00	1982-01-01	1982-02-01
	000250	AD3112	60	.50	1982-02-01	1982-03-15
	000250	AD3112	60	.50	1982-12-01	1983-01-01
	000250	AD3112	60	1.00	1983-01-01	1983-02-01
	000250	AD3112	70	.50	1982-02-01	1982-03-15
	000250	AD3112	70	1.00	1982-03-15	1982-08-15
	000250	AD3112	70	.25	1982-08-15	1982-10-15
	000250	AD3112	80	.25	1982-08-15	1982-10-15
	000250	AD3112	80	.50	1982-10-15	1982-12-01
	000250	AD3112	180	.50	1982-08-15	1983-01-01
	000260	AD3113	70	.50	1982-06-15	1982-07-01
	000260	AD3113	70	1.00	1982-07-01	1983-02-01
	000260	AD3113	80	1.00	1982-01-01	1982-03-01
	000260	AD3113	80	.50	1982-03-01	1982-04-15
	000260	AD3113	180	.50	1982-03-01	1982-04-15
	000260	AD3113	180	1.00	1982-04-15	1982-06-01
	000260	AD3113	180	.50	1982-06-01	1982-07-01
	000270	AD3113	60	.50	1982-03-01	1982-04-01
	000270	AD3113	60	1.00	1982-04-01	1982-09-01
	000270	AD3113	60	.25	1982-09-01	1982-10-15
	000270	AD3113	70	.75	1982-09-01	1982-10-15
	000270	AD3113	70	1.00	1982-10-15	1983-02-01

Sample Database Tables

Name:	EMPNO	PROJNO	ACTNO	EMPTIME	EMSTDATE	EMENDATE
	000270	AD3113	80	1.00	1982-01-01	1982-03-01
	000270	AD3113	80	.50	1982-03-01	1982-04-01
	000030	IF1000	10	.50	1982-06-01	1983-01-01
	000130	IF1000	90	1.00	1982-01-01	1982-10-01
	000130	IF1000	100	.50	1982-10-01	1983-01-01
	000140	IF1000	90	.50	1982-10-01	1983-01-01
	000030	IF2000	10	.50	1982-01-01	1983-01-01
	000140	IF2000	100	1.00	1982-01-01	1982-03-01
	000140	IF2000	100	.50	1982-03-01	1982-07-01
	000140	IF2000	110	.50	1982-03-01	1982-07-01
	000140	IF2000	110	.50	1982-10-01	1983-01-01
	000010	MA2100	10	.50	1982-01-01	1982-11-01
	000110	MA2100	20	1.00	1982-01-01	1982-03-01
	000010	MA2110	10	1.00	1982-01-01	1983-02-01
	000200	MA2111	50	1.00	1982-01-01	1982-06-15
	000200	MA2111	60	1.00	1982-06-15	1983-02-01
	000220	MA2111	40	1.00	1982-01-01	1983-02-01
	000150	MA2112	60	1.00	1982-01-01	1982-07-15
	000150	MA2112	180	1.00	1982-07-15	1983-02-01
	000170	MA2112	60	1.00	1982-01-01	1983-06-01
	000170	MA2112	70	1.00	1982-06-01	1983-02-01
	000190	MA2112	70	1.00	1982-02-01	1982-10-01
	000190	MA2112	80	1.00	1982-10-01	1983-10-01
	000160	MA2113	60	1.00	1982-07-15	1983-02-01
	000170	MA2113	80	1.00	1982-01-01	1983-02-01
	000180	MA2113	70	1.00	1982-04-01	1982-06-15
	000210	MA2113	80	.50	1982-10-01	1983-02-01
	000210	MA2113	180	.50	1982-10-01	1983-02-01
	000050	OP1000	10	.25	1982-01-01	1983-02-01
	000090	OP1010	10	1.00	1982-01-01	1983-02-01
	000280	OP1010	130	1.00	1982-01-01	1983-02-01
	000290	OP1010	130	1.00	1982-01-01	1983-02-01
	000300	OP1010	130	1.00	1982-01-01	1983-02-01
	000310	OP1010	130	1.00	1982-01-01	1983-02-01
	000050	OP2010	10	.75	1982-01-01	1983-02-01
	000100	OP2010	10	1.00	1982-01-01	1983-02-01
	000320	OP2011	140	.75	1982-01-01	1983-02-01

Sample Database Tables

Name:	EMPNO	PROJNO	ACTNO	EMPTIME	EMSTDATE	EMENDATE
	000320	OP2011	150	.25	1982-01-01	1983-02-01
	000330	OP2012	140	.25	1982-01-01	1983-02-01
	000330	OP2012	160	.75	1982-01-01	1983-02-01
	000340	OP2013	140	.50	1982-01-01	1983-02-01
	000340	OP2013	170	.50	1982-01-01	1983-02-01
	000020	PL2100	30	1.00	1982-01-01	1982-09-15

EMP_PHOTO Table

Name:	EMPNO	PHOTO_FORMAT	PICTURE
Type:	char(6) not null	varchar(10) not null	blob(100k)
Desc:	Employee number	Photo format	Photo of employee
Values:	000130	bitmap	db200130.bmp
	000130	gif	db200130.gif
	000130	xwd	db200130.xwd
	000140	bitmap	db200140.bmp
	000140	gif	db200140.gif
	000140	xwd	db200140.xwd
	000150	bitmap	db200150.bmp
	000150	gif	db200150.gif
	000150	xwd	db200150.xwd
	000190	bitmap	db200190.bmp
	000190	gif	db200190.gif
	000190	xwd	db200190.xwd

- “Quintana Photo” on page 84 shows the picture of the employee, Delores Quintana.
- “Nicholls Photo” on page 85 shows the picture of the employee, Heather Nicholls.
- “Adamson Photo” on page 87 shows the picture of the employee, Bruce Adamson.
- “Walker Photo” on page 88 shows the picture of the employee, James Walker.

EMP_RESUME Table

Name:	EMPNO	RESUME_FORMAT	RESUME
Type:	char(6) not null	varchar(10) not null	clob(5k)
Desc:	Employee number	Resume Format	Resume of employee
Values:	000130	ascii	db200130.asc

Name:	EMPNO	RESUME_FORMAT	RESUME
	000130	script	db200130.scr
	000140	ascii	db200140.asc
	000140	script	db200140.scr
	000150	ascii	db200150.asc
	000150	script	db200150.scr
	000190	ascii	db200190.asc
	000190	script	db200190.scr

- “Quintana Resume” on page 84 shows the resume of the employee, Delores Quintana.
- “Nicholls Resume” on page 86 shows the resume of the employee, Heather Nicholls.
- “Adamson Resume” on page 87 shows the resume of the employee, Bruce Adamson.
- “Walker Resume” on page 89 shows the resume of the employee, James Walker.

IN_TRAY Table

Name:	RECEIVED	SOURCE	SUBJECT	NOTE_TEXT
Type:	timestamp	char(8)	char(64)	varchar(3000)
Desc:	Date and Time received	User id of person sending note	Brief description	The note

ORG Table

Name:	DEPTNUMB	DEPTNAME	MANAGER	DIVISION	LOCATION
Type:	smallint not null	varchar(14)	smallint	varchar(10)	varchar(13)
Desc:	Department number	Department name	Manager number	Division of corporation	City
Values:	10	Head Office	160	Corporate	New York
	15	New England	50	Eastern	Boston
	20	Mid Atlantic	10	Eastern	Washington
	38	South Atlantic	30	Eastern	Atlanta
	42	Great Lakes	100	Midwest	Chicago
	51	Plains	140	Midwest	Dallas
	66	Pacific	270	Western	San Francisco
	84	Mountain	290	Western	Denver

Sample Database Tables

PROJECT Table

Name:	PROJNO	PROJNAME	DEPTNO	RESPEMP	PRSTAFF	PRSTDATE	PRENDATE	MAJPROJ
Type:	char(6) not null	varchar(24) not null	char(3) not null	char(6) not null	dec(5,2)	date	date	char(6)
Desc:	Project number	Project name	Department responsible	Employee responsible	Estimated mean staffing	Estimated start date	Estimated end date	Major project, for a subproject
Values:	AD3100	ADMIN SERVICES	D01	000010	6.5	1982-01-01	1983-02-01	-
	AD3110	GENERAL ADMIN SYSTEMS	D21	000070	6	1982-01-01	1983-02-01	AD3100
	AD3111	PAYROLL PROGRAMMING	D21	000230	2	1982-01-01	1983-02-01	AD3110
	AD3112	PERSONNEL PROGRAMMING	D21	000250	1	1982-01-01	1983-02-01	AD3110
	AD3113	ACCOUNT PROGRAMMING	D21	000270	2	1982-01-01	1983-02-01	AD3110
	IF1000	QUERY SERVICES	C01	000030	2	1982-01-01	1983-02-01	-
	IF2000	USER EDUCATION	C01	000030	1	1982-01-01	1983-02-01	-
	MA2100	WELD LINE AUTOMATION	D01	000010	12	1982-01-01	1983-02-01	-
	MA2110	W L PROGRAMMING	D11	000060	9	1982-01-01	1983-02-01	MA2100
	MA2111	W L PROGRAM DESIGN	D11	000220	2	1982-01-01	1982-12-01	MA2110
	MA2112	W L ROBOT DESIGN	D11	000150	3	1982-01-01	1982-12-01	MA2110
	MA2113	W L PROD CONT PROGS	D11	000160	3	1982-02-15	1982-12-01	MA2110
	OP1000	OPERATION SUPPORT	E01	000050	6	1982-01-01	1983-02-01	-
	OP1010	OPERATION	E11	000090	5	1982-01-01	1983-02-01	OP1000
	OP2000	GEN SYSTEMS SERVICES	E01	000050	5	1982-01-01	1983-02-01	-
	OP2010	SYSTEMS SUPPORT	E21	000100	4	1982-01-01	1983-02-01	OP2000
	OP2011	SCP SYSTEMS SUPPORT	E21	000320	1	1982-01-01	1983-02-01	OP2010
	OP2012	APPLICATIONS SUPPORT	E21	000330	1	1982-01-01	1983-02-01	OP2010
	OP2013	DB/DC SUPPORT	E21	000340	1	1982-01-01	1983-02-01	OP2010
	PL2100	WELD LINE PLANNING	B01	000020	1	1982-01-01	1982-09-15	MA2100

SALES Table

Name:	SALES_DATE	SALES_PERSON	REGION	SALES
Type:	date	varchar(15)	varchar(15)	int
Desc:	Date of sales	Employee's last name	Region of sales	Number of sales
Values:	12/31/1995	LUCCHESSI	Ontario-South	1
	12/31/1995	LEE	Ontario-South	3
	12/31/1995	LEE	Quebec	1
	12/31/1995	LEE	Manitoba	2
	12/31/1995	GOUNOT	Quebec	1
	03/29/1996	LUCCHESSI	Ontario-South	3
	03/29/1996	LUCCHESSI	Quebec	1
	03/29/1996	LEE	Ontario-South	2
	03/29/1996	LEE	Ontario-North	2
	03/29/1996	LEE	Quebec	3
	03/29/1996	LEE	Manitoba	5
	03/29/1996	GOUNOT	Ontario-South	3
	03/29/1996	GOUNOT	Quebec	1
	03/29/1996	GOUNOT	Manitoba	7
	03/30/1996	LUCCHESSI	Ontario-South	1
	03/30/1996	LUCCHESSI	Quebec	2
	03/30/1996	LUCCHESSI	Manitoba	1
	03/30/1996	LEE	Ontario-South	7
	03/30/1996	LEE	Ontario-North	3
	03/30/1996	LEE	Quebec	7
	03/30/1996	LEE	Manitoba	4
	03/30/1996	GOUNOT	Ontario-South	2
	03/30/1996	GOUNOT	Quebec	18
	03/30/1996	GOUNOT	Manitoba	1
	03/31/1996	LUCCHESSI	Manitoba	1
	03/31/1996	LEE	Ontario-South	14
	03/31/1996	LEE	Ontario-North	3
	03/31/1996	LEE	Quebec	7
	03/31/1996	LEE	Manitoba	3
	03/31/1996	GOUNOT	Ontario-South	2
	03/31/1996	GOUNOT	Quebec	1
	04/01/1996	LUCCHESSI	Ontario-South	3
	04/01/1996	LUCCHESSI	Manitoba	1
	04/01/1996	LEE	Ontario-South	8
	04/01/1996	LEE	Ontario-North	-
	04/01/1996	LEE	Quebec	8
	04/01/1996	LEE	Manitoba	9
	04/01/1996	GOUNOT	Ontario-South	3

Sample Database Tables

Name:	SALES_DATE	SALES_PERSON	REGION	SALES
	04/01/1996	GOUNOT	Ontario-North	1
	04/01/1996	GOUNOT	Quebec	3
	04/01/1996	GOUNOT	Manitoba	7

STAFF Table

Name:	ID	NAME	DEPT	JOB	YEARS	SALARY	COMM
Type:	smallint not null	varchar(9)	smallint	char(5)	smallint	dec(7,2)	dec(7,2)
Desc:	Employee number	Employee name	Department number	Job type	Years of service	Current salary	Commission
Values:	10	Sanders	20	Mgr	7	18357.50	-
	20	Pernal	20	Sales	8	18171.25	612.45
	30	Marenghi	38	Mgr	5	17506.75	-
	40	O'Brien	38	Sales	6	18006.00	846.55
	50	Hanes	15	Mgr	10	20659.80	-
	60	Quigley	38	Sales	-	16808.30	650.25
	70	Rothman	15	Sales	7	16502.83	1152.00
	80	James	20	Clerk	-	13504.60	128.20
	90	Koonitz	42	Sales	6	18001.75	1386.70
	100	Plotz	42	Mgr	7	18352.80	-
	110	Ngan	15	Clerk	5	12508.20	206.60
	120	Naughton	38	Clerk	-	12954.75	180.00
	130	Yamaguchi	42	Clerk	6	10505.90	75.60
	140	Fraye	51	Mgr	6	21150.00	-
	150	Williams	51	Sales	6	19456.50	637.65
	160	Molinare	10	Mgr	7	22959.20	-
	170	Kermisch	15	Clerk	4	12258.50	110.10
	180	Abrahams	38	Clerk	3	12009.75	236.50
	190	Sneider	20	Clerk	8	14252.75	126.50
	200	Scoutten	42	Clerk	-	11508.60	84.20
	210	Lu	10	Mgr	10	20010.00	-
	220	Smith	51	Sales	7	17654.50	992.80
	230	Lundquist	51	Clerk	3	13369.80	189.65
	240	Daniels	10	Mgr	5	19260.25	-
	250	Wheeler	51	Clerk	6	14460.00	513.30
	260	Jones	10	Mgr	12	21234.00	-
	270	Lea	66	Mgr	9	18555.50	-
	280	Wilson	66	Sales	9	18674.50	811.50

Sample Database Tables

Name:	ID	NAME	DEPT	JOB	YEARS	SALARY	COMM
	290	Quill	84	Mgr	10	19818.00	-
	300	Davis	84	Sales	5	15454.50	806.10
	310	Graham	66	Sales	13	21000.00	200.30
	320	Gonzales	66	Sales	4	16858.20	844.00
	330	Burke	66	Clerk	1	10988.00	55.50
	340	Edwards	84	Sales	7	17844.00	1285.00
	350	Gafney	84	Clerk	5	13030.50	188.00

STAFFG Table

Note: STAFFG is only created for double-byte code pages.

Name:	ID	NAME	DEPT	JOB	YEARS	SALARY	COMM
Type:	smallint not null	vargraphic(9)	smallint	graphic(5)	smallint	dec(9,0)	dec(9,0)
Desc:	Employee number	Employee name	Department number	Job type	Years of service	Current salary	Commission
Values:	10	Sanders	20	Mgr	7	18357.50	-
	20	Pernal	20	Sales	8	18171.25	612.45
	30	Marenghi	38	Mgr	5	17506.75	-
	40	O'Brien	38	Sales	6	18006.00	846.55
	50	Hanes	15	Mgr	10	20659.80	-
	60	Quigley	38	Sales	-	16808.30	650.25
	70	Rothman	15	Sales	7	16502.83	1152.00
	80	James	20	Clerk	-	13504.60	128.20
	90	Koonitz	42	Sales	6	18001.75	1386.70
	100	Plotz	42	Mgr	7	18352.80	-
	110	Ngan	15	Clerk	5	12508.20	206.60
	120	Naughton	38	Clerk	-	12954.75	180.00
	130	Yamaguchi	42	Clerk	6	10505.90	75.60
	140	Fraye	51	Mgr	6	21150.00	-
	150	Williams	51	Sales	6	19456.50	637.65
	160	Molinare	10	Mgr	7	22959.20	-
	170	Kermisch	15	Clerk	4	12258.50	110.10
	180	Abrahams	38	Clerk	3	12009.75	236.50
	190	Sneider	20	Clerk	8	14252.75	126.50
	200	Scoutten	42	Clerk	-	11508.60	84.20
	210	Lu	10	Mgr	10	20010.00	-
	220	Smith	51	Sales	7	17654.50	992.80

Sample Database Tables

Name:	ID	NAME	DEPT	JOB	YEARS	SALARY	COMM
	230	Lundquist	51	Clerk	3	13369.80	189.65
	240	Daniels	10	Mgr	5	19260.25	-
	250	Wheeler	51	Clerk	6	14460.00	513.30
	260	Jones	10	Mgr	12	21234.00	-
	270	Lea	66	Mgr	9	18555.50	-
	280	Wilson	66	Sales	9	18674.50	811.50
	290	Quill	84	Mgr	10	19818.00	-
	300	Davis	84	Sales	5	15454.50	806.10
	310	Graham	66	Sales	13	21000.00	200.30
	320	Gonzales	66	Sales	4	16858.20	844.00
	330	Burke	66	Clerk	1	10988.00	55.50
	340	Edwards	84	Sales	7	17844.00	1285.00
	350	Gafney	84	Clerk	5	13030.50	188.00

Sample Files with BLOB and CLOB Data Type

This section shows the data found in the EMP_PHOTO files (pictures of employees) and EMP_RESUME files (resumes of employees).

Quintana Photo



Figure 7. Delores M. Quintana

Quintana Resume

The following text is found in the db200130.asc and db200130.scr files.

Resume: Delores M. Quintana

Personal Information

Address: 1150 Eglinton Ave Mellonville, Idaho 83725
Phone: (208) 555-9933
Birthdate: September 15, 1925
Sex: Female
Marital Status: Married
Height: 5'2"
Weight: 120 lbs.

Department Information

Employee Number: 000130
Dept Number: C01
Manager: Sally Kwan
Position: Analyst
Phone: (208) 555-4578
Hire Date: 1971-07-28

Education

1965 Math and English, B.A. Adelphi University
1960 Dental Technician Florida Institute of Technology

Work History

10/91 - present Advisory Systems Analyst Producing documentation tools for engineering department.
12/85 - 9/91 Technical Writer Writer, text programmer, and planner.
1/79 - 11/85 COBOL Payroll Programmer Writing payroll programs for a diesel fuel company.

Interests

- Cooking
- Reading
- Sewing
- Remodeling

Nicholls Photo

Sample Database Tables



Figure 8. Heather A. Nicholls

Nicholls Resume

The following text is found in the db200140.asc and db200140.scr files.

Resume: Heather A. Nicholls

Personal Information

Address:	844 Don Mills Ave Mellonville, Idaho 83734
Phone:	(208) 555-2310
Birthdate:	January 19, 1946
Sex:	Female
Marital Status:	Single
Height:	5'8"
Weight:	130 lbs.

Department Information

Employee Number:	000140
Dept Number:	C01
Manager:	Sally Kwan
Position:	Analyst
Phone:	(208) 555-1793
Hire Date:	1976-12-15

Education

1972	Computer Engineering, Ph.D. University of Washington
1969	Music and Physics, M.A. Vassar College

Work History

2/83 - present

Architect, OCR Development Designing the architecture of OCR products.

12/76 - 1/83

Text Programmer Optical character recognition (OCR) programming in PL/I.

9/72 - 11/76

Punch Card Quality Analyst Checking punch cards met quality specifications.

Interests

- Model railroading
- Interior decorating
- Embroidery
- Knitting

Adamson Photo



Figure 9. Bruce Adamson

Adamson Resume

The following text is found in the db200150.asc and db200150.scr files.

Resume: Bruce Adamson

Personal Information

Address:	3600 Steeles Ave Mellonville, Idaho 83757
Phone:	(208) 555-4489
Birthdate:	May 17, 1947
Sex:	Male
Marital Status:	Married
Height:	6'0"
Weight:	175 lbs.

Department Information

Sample Database Tables

Employee Number:	000150
Dept Number:	D11
Manager:	Irving Stern
Position:	Designer
Phone:	(208) 555-4510
Hire Date:	1972-02-12

Education

1971	Environmental Engineering, M.Sc. Johns Hopkins University
------	---

1968	American History, B.A. Northwestern University
------	--

Work History

8/79 - present	Neural Network Design Developing neural networks for machine intelligence products.
----------------	---

2/72 - 7/79	Robot Vision Development Developing rule-based systems to emulate sight.
-------------	--

9/71 - 1/72	Numerical Integration Specialist Helping bank systems communicate with each other.
-------------	--

Interests

- Racing motorcycles
- Building loudspeakers
- Assembling personal computers
- Sketching

Walker Photo




Figure 10. James H. Walker

Walker Resume

The following text is found in the db200190.asc and db200190.scr files.

Resume: James H. Walker

Personal Information

Address: 3500 Steeles Ave Mellonville, Idaho 83757
Phone: (208) 555-7325
Birthdate: June 25, 1952
Sex: Male
Marital Status: Single
Height: 5'11"
Weight: 166 lbs.

Department Information

Employee Number: 000190
Dept Number: D11
Manager: Irving Stern
Position: Designer
Phone: (208) 555-2986
Hire Date: 1974-07-26

Education

1974 Computer Studies, B.Sc. University of Massachusetts
 1972 Linguistic Anthropology, B.A. University of Toronto

Work History

6/87 - present Microcode Design Optimizing algorithms for mathematical functions.
 4/77 - 5/87 Printer Technical Support Installing and supporting laser printers.
 9/74 - 3/77 Maintenance Programming Patching assembly language compiler for mainframes.

Interests

- Wine tasting
- Skiing
- Swimming
- Dancing

Sample Database Tables

Appendix B. Using the DB2 Library

The DB2 Universal Database library consists of online help, books (PDF and HTML), and sample programs in HTML format. This section describes the information that is provided, and how you can access it.

To access product information online, you can use the Information Center. For more information, see “Accessing Information with the Information Center” on page 105. You can view task information, DB2 books, troubleshooting information, sample programs, and DB2 information on the Web.

DB2 PDF Files and Printed Books

DB2 Information

The following table divides the DB2 books into four categories:

DB2 Guide and Reference Information

These books contain the common DB2 information for all platforms.

DB2 Installation and Configuration Information

These books are for DB2 on a specific platform. For example, there are separate *Quick Beginnings* books for DB2 on OS/2, Windows, and UNIX-based platforms.

Cross-platform sample programs in HTML

These samples are the HTML version of the sample programs that are installed with the Application Development Client. The samples are for informational purposes and do not replace the actual programs.

Release notes

These files contain late-breaking information that could not be included in the DB2 books.

The installation manuals, release notes, and tutorials are viewable in HTML directly from the product CD-ROM. Most books are available in HTML on the product CD-ROM for viewing and in Adobe Acrobat (PDF) format on the DB2 publications CD-ROM for viewing and printing. You can also order a printed copy from IBM; see “Ordering the Printed Books” on page 101. The following table lists books that can be ordered.

On OS/2 and Windows platforms, you can install the HTML files under the `sqllib\doc\html` directory. DB2 information is translated into different

languages; however, all the information is not translated into every language. Whenever information is not available in a specific language, the English information is provided

On UNIX platforms, you can install multiple language versions of the HTML files under the doc/%L/html directories, where %L represents the locale. For more information, refer to the appropriate *Quick Beginnings* book.

You can obtain DB2 books and access information in a variety of ways:

- “Viewing Information Online” on page 104
- “Searching Information Online” on page 108
- “Ordering the Printed Books” on page 101
- “Printing the PDF Books” on page 100

Table 1. DB2 Information

Name	Description	Form Number PDF File Name	HTML Directory
DB2 Guide and Reference Information			
<i>Administration Guide</i>	<i>Administration Guide: Planning</i> provides an overview of database concepts, information about design issues (such as logical and physical database design), and a discussion of high availability.	SC09-2946 db2d1x70	db2d0
	<i>Administration Guide: Implementation</i> provides information on implementation issues such as implementing your design, accessing databases, auditing, backup and recovery.	SC09-2944 db2d2x70	
	<i>Administration Guide: Performance</i> provides information on database environment and application performance evaluation and tuning.	SC09-2945 db2d3x70	
	You can order the three volumes of the <i>Administration Guide</i> in the English language in North America using the form number SBOF-8934.		
<i>Administrative API Reference</i>	Describes the DB2 application programming interfaces (APIs) and data structures that you can use to manage your databases. This book also explains how to call APIs from your applications.	SC09-2947 db2b0x70	db2b0

Table 1. DB2 Information (continued)

Name	Description	Form Number PDF File Name	HTML Directory
<i>Application Building Guide</i>	Provides environment setup information and step-by-step instructions about how to compile, link, and run DB2 applications on Windows, OS/2, and UNIX-based platforms.	SC09-2948 db2axx70	db2ax
<i>APPC, CPI-C, and SNA Sense Codes</i>	Provides general information about APPC, CPI-C, and SNA sense codes that you may encounter when using DB2 Universal Database products.	No form number db2apx70	db2ap
	Available in HTML format only.		
<i>Application Development Guide</i>	Explains how to develop applications that access DB2 databases using embedded SQL or Java (JDBC and SQLJ). Discussion topics include writing stored procedures, writing user-defined functions, creating user-defined types, using triggers, and developing applications in partitioned environments or with federated systems.	SC09-2949 db2a0x70	db2a0
<i>CLI Guide and Reference</i>	Explains how to develop applications that access DB2 databases using the DB2 Call Level Interface, a callable SQL interface that is compatible with the Microsoft ODBC specification.	SC09-2950 db2l0x70	db2l0
<i>Command Reference</i>	Explains how to use the Command Line Processor and describes the DB2 commands that you can use to manage your database.	SC09-2951 db2n0x70	db2n0
<i>Connectivity Supplement</i>	Provides setup and reference information on how to use DB2 for AS/400, DB2 for OS/390, DB2 for MVS, or DB2 for VM as DRDA application requesters with DB2 Universal Database servers. This book also details how to use DRDA application servers with DB2 Connect application requesters.	No form number db2h1x70	db2h1
	Available in HTML and PDF only.		

Table 1. DB2 Information (continued)

Name	Description	Form Number PDF File Name	HTML Directory
<i>Data Movement Utilities Guide and Reference</i>	Explains how to use DB2 utilities, such as import, export, load, AutoLoader, and DPROF, that facilitate the movement of data.	SC09-2955 db2dmx70	db2dm
<i>Data Warehouse Center Administration Guide</i>	Provides information on how to build and maintain a data warehouse using the Data Warehouse Center.	SC26-9993 db2ddx70	db2dd
<i>Data Warehouse Center Application Integration Guide</i>	Provides information to help programmers integrate applications with the Data Warehouse Center and with the Information Catalog Manager.	SC26-9994 db2adx70	db2ad
<i>DB2 Connect User's Guide</i>	Provides concepts, programming, and general usage information for the DB2 Connect products.	SC09-2954 db2c0x70	db2c0
<i>DB2 Query Patroller Administration Guide</i>	Provides an operational overview of the DB2 Query Patroller system, specific operational and administrative information, and task information for the administrative graphical user interface utilities.	SC09-2958 db2dwx70	db2dw
<i>DB2 Query Patroller User's Guide</i>	Describes how to use the tools and functions of the DB2 Query Patroller.	SC09-2960 db2wwx70	db2ww
<i>Glossary</i>	Provides definitions for terms used in DB2 and its components. Available in HTML format and in the <i>SQL Reference</i> .	No form number db2t0x70	db2t0
<i>Image, Audio, and Video Extenders Administration and Programming</i>	Provides general information about DB2 extenders, and information on the administration and configuration of the image, audio, and video (IAV) extenders and on programming using the IAV extenders. It includes reference information, diagnostic information (with messages), and samples.	SC26-9929 dmbu7x70	dmbu7
<i>Information Catalog Manager Administration Guide</i>	Provides guidance on managing information catalogs.	SC26-9995 db2dix70	db2di

Table 1. DB2 Information (continued)

Name	Description	Form Number PDF File Name	HTML Directory
<i>Information Catalog Manager Programming Guide and Reference</i>	Provides definitions for the architected interfaces for the Information Catalog Manager.	SC26-9997 db2bix70	db2bi
<i>Information Catalog Manager User's Guide</i>	Provides information on using the Information Catalog Manager user interface.	SC26-9996 db2aix70	db2ai
<i>Installation and Configuration Supplement</i>	Guides you through the planning, installation, and setup of platform-specific DB2 clients. This supplement also contains information on binding, setting up client and server communications, DB2 GUI tools, DRDA AS, distributed installation, the configuration of distributed requests, and accessing heterogeneous data sources.	GC09-2957 db2iyx70	db2iy
<i>Message Reference</i>	Lists messages and codes issued by DB2, the Information Catalog Manager, and the Data Warehouse Center, and describes the actions you should take. You can order both volumes of the Message Reference in the English language in North America with the form number SBOF-8932.	Volume 1 GC09-2978 db2m1x70 Volume 2 GC09-2979 db2m2x70	db2m0
<i>OLAP Integration Server Administration Guide</i>	Explains how to use the Administration Manager component of the OLAP Integration Server.	SC27-0787 db2dpx70	n/a
<i>OLAP Integration Server Metaoutline User's Guide</i>	Explains how to create and populate OLAP metaoutlines using the standard OLAP Metaoutline interface (not by using the Metaoutline Assistant).	SC27-0784 db2upx70	n/a
<i>OLAP Integration Server Model User's Guide</i>	Explains how to create OLAP models using the standard OLAP Model Interface (not by using the Model Assistant).	SC27-0783 db2lpx70	n/a
<i>OLAP Setup and User's Guide</i>	Provides configuration and setup information for the OLAP Starter Kit.	SC27-0702 db2ipx70	db2ip
<i>OLAP Spreadsheet Add-in User's Guide for Excel</i>	Describes how to use the Excel spreadsheet program to analyze OLAP data.	SC27-0786 db2epx70	db2ep

Table 1. DB2 Information (continued)

Name	Description	Form Number PDF File Name	HTML Directory
<i>OLAP Spreadsheet Add-in User's Guide for Lotus 1-2-3</i>	Describes how to use the Lotus 1-2-3 spreadsheet program to analyze OLAP data.	SC27-0785 db2tpx70	db2tp
<i>Replication Guide and Reference</i>	Provides planning, configuration, administration, and usage information for the IBM Replication tools supplied with DB2.	SC26-9920 db2e0x70	db2e0
<i>Spatial Extender User's Guide and Reference</i>	Provides information about installing, configuring, administering, programming, and troubleshooting the Spatial Extender. Also provides significant descriptions of spatial data concepts and provides reference information (messages and SQL) specific to the Spatial Extender.	SC27-0701 db2sbx70	db2sb
<i>SQL Getting Started</i>	Introduces SQL concepts and provides examples for many constructs and tasks.	SC09-2973 db2y0x70	db2y0
<i>SQL Reference, Volume 1 and Volume 2</i>	Describes SQL syntax, semantics, and the rules of the language. This book also includes information about release-to-release incompatibilities, product limits, and catalog views. You can order both volumes of the <i>SQL Reference</i> in the English language in North America with the form number SBOF-8933.	Volume 1 SC09-2974 db2s1x70 Volume 2 SC09-2975 db2s2x70	db2s0
<i>System Monitor Guide and Reference</i>	Describes how to collect different kinds of information about databases and the database manager. This book explains how to use the information to understand database activity, improve performance, and determine the cause of problems.	SC09-2956 db2f0x70	db2f0
<i>Text Extender Administration and Programming</i>	Provides general information about DB2 extenders and information on the administration and configuring of the text extender and on programming using the text extenders. It includes reference information, diagnostic information (with messages) and samples.	SC26-9930 desu9x70	desu9

Table 1. DB2 Information (continued)

Name	Description	Form Number PDF File Name	HTML Directory
<i>Troubleshooting Guide</i>	Helps you determine the source of errors, recover from problems, and use diagnostic tools in consultation with DB2 Customer Service.	GC09-2850 db2p0x70	db2p0
<i>What's New</i>	Describes the new features, functions, and enhancements in DB2 Universal Database, Version 7.	SC09-2976 db2q0x70	db2q0
DB2 Installation and Configuration Information			
<i>DB2 Connect Enterprise Edition for OS/2 and Windows Quick Beginnings</i>	Provides planning, migration, installation, and configuration information for DB2 Connect Enterprise Edition on the OS/2 and Windows 32-bit operating systems. This book also contains installation and setup information for many supported clients.	GC09-2953 db2c6x70	db2c6
<i>DB2 Connect Enterprise Edition for UNIX Quick Beginnings</i>	Provides planning, migration, installation, configuration, and task information for DB2 Connect Enterprise Edition on UNIX-based platforms. This book also contains installation and setup information for many supported clients.	GC09-2952 db2cyx70	db2cy
<i>DB2 Connect Personal Edition Quick Beginnings</i>	Provides planning, migration, installation, configuration, and task information for DB2 Connect Personal Edition on the OS/2 and Windows 32-bit operating systems. This book also contains installation and setup information for all supported clients.	GC09-2967 db2c1x70	db2c1
<i>DB2 Connect Personal Edition Quick Beginnings for Linux</i>	Provides planning, installation, migration, and configuration information for DB2 Connect Personal Edition on all supported Linux distributions.	GC09-2962 db2c4x70	db2c4
<i>DB2 Data Links Manager Quick Beginnings</i>	Provides planning, installation, configuration, and task information for DB2 Data Links Manager for AIX and Windows 32-bit operating systems.	GC09-2966 db2z6x70	db2z6

Table 1. DB2 Information (continued)

Name	Description	Form Number PDF File Name	HTML Directory
<i>DB2 Enterprise - Extended Edition for UNIX Quick Beginnings</i>	Provides planning, installation, and configuration information for DB2 Enterprise - Extended Edition on UNIX-based platforms. This book also contains installation and setup information for many supported clients.	GC09-2964 db2v3x70	db2v3
<i>DB2 Enterprise - Extended Edition for Windows Quick Beginnings</i>	Provides planning, installation, and configuration information for DB2 Enterprise - Extended Edition for Windows 32-bit operating systems. This book also contains installation and setup information for many supported clients.	GC09-2963 db2v6x70	db2v6
<i>DB2 for OS/2 Quick Beginnings</i>	Provides planning, installation, migration, and configuration information for DB2 Universal Database on the OS/2 operating system. This book also contains installation and setup information for many supported clients.	GC09-2968 db2i2x70	db2i2
<i>DB2 for UNIX Quick Beginnings</i>	Provides planning, installation, migration, and configuration information for DB2 Universal Database on UNIX-based platforms. This book also contains installation and setup information for many supported clients.	GC09-2970 db2ixx70	db2ix
<i>DB2 for Windows Quick Beginnings</i>	Provides planning, installation, migration, and configuration information for DB2 Universal Database on Windows 32-bit operating systems. This book also contains installation and setup information for many supported clients.	GC09-2971 db2i6x70	db2i6
<i>DB2 Personal Edition Quick Beginnings</i>	Provides planning, installation, migration, and configuration information for DB2 Universal Database Personal Edition on the OS/2 and Windows 32-bit operating systems.	GC09-2969 db2i1x70	db2i1
<i>DB2 Personal Edition Quick Beginnings for Linux</i>	Provides planning, installation, migration, and configuration information for DB2 Universal Database Personal Edition on all supported Linux distributions.	GC09-2972 db2i4x70	db2i4

Table 1. DB2 Information (continued)

Name	Description	Form Number PDF File Name	HTML Directory
<i>DB2 Query Patroller Installation Guide</i>	Provides installation information about DB2 Query Patroller.	GC09-2959 db2iwx70	db2iw
<i>DB2 Warehouse Manager Installation Guide</i>	Provides installation information for warehouse agents, warehouse transformers, and the Information Catalog Manager.	GC26-9998 db2idx70	db2id
Cross-Platform Sample Programs in HTML			
Sample programs in HTML	Provides the sample programs in HTML format for the programming languages on all platforms supported by DB2. The sample programs are provided for informational purposes only. Not all samples are available in all programming languages. The HTML samples are only available when the DB2 Application Development Client is installed. For more information on the programs, refer to the <i>Application Building Guide</i> .	No form number	db2hs
Release Notes			
<i>DB2 Connect Release Notes</i>	Provides late-breaking information that could not be included in the DB2 Connect books.	See note #2.	db2cr
<i>DB2 Installation Notes</i>	Provides late-breaking installation-specific information that could not be included in the DB2 books.	Available on product CD-ROM only.	
<i>DB2 Release Notes</i>	Provides late-breaking information about all DB2 products and features that could not be included in the DB2 books.	See note #2.	db2ir

Notes:

1. The character *x* in the sixth position of the file name indicates the language version of a book. For example, the file name *db2d0e70* identifies the English version of the *Administration Guide* and the file name *db2d0f70* identifies the French version of the same book. The following letters are used in the sixth position of the file name to indicate the language version:

Language	Identifier
Brazilian Portuguese	b

Bulgarian	u
Czech	x
Danish	d
Dutch	q
English	e
Finnish	y
French	f
German	g
Greek	a
Hungarian	h
Italian	i
Japanese	j
Korean	k
Norwegian	n
Polish	p
Portuguese	v
Russian	r
Simp. Chinese	c
Slovenian	l
Spanish	z
Swedish	s
Trad. Chinese	t
Turkish	m

2. Late breaking information that could not be included in the DB2 books is available in the Release Notes in HTML format and as an ASCII file. The HTML version is available from the Information Center and on the product CD-ROMs. To view the ASCII file:
 - On UNIX-based platforms, see the Release.Notes file. This file is located in the DB2DIR/Readme/%L directory, where %L represents the locale name and DB2DIR represents:
 - /usr/lpp/db2_07_01 on AIX
 - /opt/IBMdbs2/V7.1 on HP-UX, PTX, Solaris, and Silicon Graphics IRIX
 - /usr/IBMdbs2/V7.1 on Linux.
 - On other platforms, see the RELEASE.TXT file. This file is located in the directory where the product is installed. On OS/2 platforms, you can also double-click the **IBM DB2** folder and then double-click the **Release Notes** icon.

Printing the PDF Books

If you prefer to have printed copies of the books, you can print the PDF files found on the DB2 publications CD-ROM. Using the Adobe Acrobat Reader, you can print either the entire book or a specific range of pages. For the file name of each book in the library, see Table 1 on page 92.

You can obtain the latest version of the Adobe Acrobat Reader from the Adobe Web site at <http://www.adobe.com>.

The PDF files are included on the DB2 publications CD-ROM with a file extension of PDF. To access the PDF files:

1. Insert the DB2 publications CD-ROM. On UNIX-based platforms, mount the DB2 publications CD-ROM. Refer to your *Quick Beginnings* book for the mounting procedures.
2. Start the Acrobat Reader.
3. Open the desired PDF file from one of the following locations:
 - On OS/2 and Windows platforms:
x:\doc\language directory, where *x* represents the CD-ROM drive and *language* represent the two-character country code that represents your language (for example, EN for English).
 - On UNIX-based platforms:
/cdrom/doc/%L directory on the CD-ROM, where */cdrom* represents the mount point of the CD-ROM and *%L* represents the name of the desired locale.

You can also copy the PDF files from the CD-ROM to a local or network drive and read them from there.

Ordering the Printed Books

You can order the printed DB2 books either individually or as a set (in North America only) by using a sold bill of forms (SBOF) number. To order books, contact your IBM authorized dealer or marketing representative, or phone 1-800-879-2755 in the United States or 1-800-IBM-4Y0U in Canada. You can also order the books from the Publications Web page at <http://www.elink.ibm.com/pbl/pbl>.

Two sets of books are available. SBOF-8935 provides reference and usage information for the DB2 Warehouse Manager. SBOF-8931 provides reference and usage information for all other DB2 Universal Database products and features. The contents of each SBOF are listed in the following table:

Table 2. Ordering the printed books

SBOF Number	Books Included	
SBOF-8931	<ul style="list-style-type: none"> • Administration Guide: Planning • Administration Guide: Implementation • Administration Guide: Performance • Administrative API Reference • Application Building Guide • Application Development Guide • CLI Guide and Reference • Command Reference • Data Movement Utilities Guide and Reference • Data Warehouse Center Administration Guide • Data Warehouse Center Application Integration Guide • DB2 Connect User's Guide • Installation and Configuration Supplement • Image, Audio, and Video Extenders Administration and Programming • Message Reference, Volumes 1 and 2 	<ul style="list-style-type: none"> • OLAP Integration Server Administration Guide • OLAP Integration Server Metaoutline User's Guide • OLAP Integration Server Model User's Guide • OLAP Integration Server User's Guide • OLAP Setup and User's Guide • OLAP Spreadsheet Add-in User's Guide for Excel • OLAP Spreadsheet Add-in User's Guide for Lotus 1-2-3 • Replication Guide and Reference • Spatial Extender Administration and Programming Guide • SQL Getting Started • SQL Reference, Volumes 1 and 2 • System Monitor Guide and Reference • Text Extender Administration and Programming • Troubleshooting Guide • What's New
SBOF-8935	<ul style="list-style-type: none"> • Information Catalog Manager Administration Guide • Information Catalog Manager User's Guide • Information Catalog Manager Programming Guide and Reference 	<ul style="list-style-type: none"> • Query Patroller Administration Guide • Query Patroller User's Guide

DB2 Online Documentation

Accessing Online Help

Online help is available with all DB2 components. The following table describes the various types of help.

Type of Help	Contents	How to Access...
Command Help	Explains the syntax of commands in the command line processor.	<p>From the command line processor in interactive mode, enter:</p> <p style="padding-left: 40px;"><i>? command</i></p> <p>where <i>command</i> represents a keyword or the entire command.</p> <p>For example, <i>? catalog</i> displays help for all the CATALOG commands, while <i>? catalog database</i> displays help for the CATALOG DATABASE command.</p>
Client Configuration Assistant Help	Explains the tasks you can perform in a window or notebook. The help includes overview and prerequisite information you need to know, and it describes how to use the window or notebook controls.	From a window or notebook, click the Help push button or press the F1 key.
Command Center Help		
Control Center Help		
Data Warehouse Center Help		
Event Analyzer Help		
Information Catalog Manager Help		
Satellite Administration Center Help		
Script Center Help		

Type of Help	Contents	How to Access...
Message Help	Describes the cause of a message and any action you should take.	<p>From the command line processor in interactive mode, enter:</p> <pre data-bbox="717 248 838 270">? XXXnnnnn</pre> <p>where <i>XXXnnnnn</i> represents a valid message identifier.</p> <p>For example, ? SQL30081 displays help about the SQL30081 message.</p> <p>To view message help one screen at a time, enter:</p> <pre data-bbox="706 501 908 524">? XXXnnnnn more</pre> <p>To save message help in a file, enter:</p> <pre data-bbox="706 591 1002 614">? XXXnnnnn > filename.ext</pre> <p>where <i>filename.ext</i> represents the file where you want to save the message help.</p>
SQL Help	Explains the syntax of SQL statements.	<p>From the command line processor in interactive mode, enter:</p> <pre data-bbox="706 786 870 808">help statement</pre> <p>where <i>statement</i> represents an SQL statement.</p> <p>For example, help SELECT displays help about the SELECT statement.</p> <p>Note: SQL help is not available on UNIX-based platforms.</p>
SQLSTATE Help	Explains SQL states and class codes.	<p>From the command line processor in interactive mode, enter:</p> <pre data-bbox="706 1088 1016 1111">? sqlstate or ? class code</pre> <p>where <i>sqlstate</i> represents a valid five-digit SQL state and <i>class code</i> represents the first two digits of the SQL state.</p> <p>For example, ? 08003 displays help for the 08003 SQL state, while ? 08 displays help for the 08 class code.</p>

Viewing Information Online

The books included with this product are in Hypertext Markup Language (HTML) softcopy format. Softcopy format enables you to search or browse the information and provides hypertext links to related information. It also makes it easier to share the library across your site.

You can view the online books or sample programs with any browser that conforms to HTML Version 3.2 specifications.

To view online books or sample programs:

- If you are running DB2 administration tools, use the Information Center.
- From a browser, click **File** → **Open Page**. The page you open contains descriptions of and links to DB2 information:
 - On UNIX-based platforms, open the following page:

```
INSTHOME/sql11ib/doc/%L/html/index.htm
```

where %L represents the locale name.

- On other platforms, open the following page:

```
sql11ib\doc\html\index.htm
```

The path is located on the drive where DB2 is installed.

If you have not installed the Information Center, you can open the page by double-clicking the **DB2 Information** icon. Depending on the system you are using, the icon is in the main product folder or the Windows Start menu.

Installing the Netscape Browser

If you do not already have a Web browser installed, you can install Netscape from the Netscape CD-ROM found in the product boxes. For detailed instructions on how to install it, perform the following:

1. Insert the Netscape CD-ROM.
2. On UNIX-based platforms only, mount the CD-ROM. Refer to your *Quick Beginnings* book for the mounting procedures.
3. For installation instructions, refer to the CDNAVnn.txt file, where *nn* represents your two character language identifier. The file is located at the root directory of the CD-ROM.

Accessing Information with the Information Center

The Information Center provides quick access to DB2 product information. The Information Center is available on all platforms on which the DB2 administration tools are available.

You can open the Information Center by double-clicking the Information Center icon. Depending on the system you are using, the icon is in the Information folder in the main product folder or the Windows **Start** menu.

You can also access the Information Center by using the toolbar and the **Help** menu on the DB2 Windows platform.

The Information Center provides six types of information. Click the appropriate tab to look at the topics provided for that type.

- Tasks** Key tasks you can perform using DB2.
- Reference** DB2 reference information, such as keywords, commands, and APIs.
- Books** DB2 books.
- Troubleshooting**
 Categories of error messages and their recovery actions.
- Sample Programs**
 Sample programs that come with the DB2 Application Development Client. If you did not install the DB2 Application Development Client, this tab is not displayed.
- Web** DB2 information on the World Wide Web. To access this information, you must have a connection to the Web from your system.

When you select an item in one of the lists, the Information Center launches a viewer to display the information. The viewer might be the system help viewer, an editor, or a Web browser, depending on the kind of information you select.

The Information Center provides a find feature, so you can look for a specific topic without browsing the lists.

For a full text search, follow the hypertext link in the Information Center to the **Search DB2 Online Information** search form.

The HTML search server is usually started automatically. If a search in the HTML information does not work, you may have to start the search server using one of the following methods:

On Windows

Click **Start** and select **Programs** → **IBM DB2** → **Information** → **Start HTML Search Server**.

On OS/2

Double-click the **DB2 for OS/2** folder, and then double-click the **Start HTML Search Server** icon.

Refer to the release notes if you experience any other problems when searching the HTML information.

Note: The Search function is not available in the Linux, PTX, and Silicon Graphics IRIX environments.

Using DB2 Wizards

Wizards help you complete specific administration tasks by taking you through each task one step at a time. Wizards are available through the Control Center and the Client Configuration Assistant. The following table lists the wizards and describes their purpose.

Note: The Create Database, Create Index, Configure Multisite Update, and Performance Configuration wizards are available for the partitioned database environment.

Wizard	Helps You to...	How to Access...
Add Database	Catalog a database on a client workstation.	From the Client Configuration Assistant, click Add .
Backup Database	Determine, create, and schedule a backup plan.	From the Control Center, right-click the database you want to back up and select Backup → Database Using Wizard .
Configure Multisite Update	Configure a multisite update, a distributed transaction, or a two-phase commit.	From the Control Center, right-click the Databases folder and select Multisite Update .
Create Database	Create a database, and perform some basic configuration tasks.	From the Control Center, right-click the Databases folder and select Create → Database Using Wizard .
Create Table	Select basic data types, and create a primary key for the table.	From the Control Center, right-click the Tables icon and select Create → Table Using Wizard .
Create Table Space	Create a new table space.	From the Control Center, right-click the Table Spaces icon and select Create → Table Space Using Wizard .
Create Index	Advise which indexes to create and drop for all your queries.	From the Control Center, right-click the Index icon and select Create → Index Using Wizard .
Performance Configuration	Tune the performance of a database by updating configuration parameters to match your business requirements.	From the Control Center, right-click the database you want to tune and select Configure Performance Using Wizard . For the partitioned database environment, from the Database Partitions view, right-click the first database partition you want to tune and select Configure Performance Using Wizard .

Wizard	Helps You to...	How to Access...
Restore Database	Recover a database after a failure. It helps you understand which backup to use, and which logs to replay.	From the Control Center, right-click the database you want to restore and select Restore → Database Using Wizard .

Setting Up a Document Server

By default, the DB2 information is installed on your local system. This means that each person who needs access to the DB2 information must install the same files. To have the DB2 information stored in a single location, perform the following steps:

1. Copy all files and subdirectories from `\sqlib\doc\html` on your local system to a Web server. Each book has its own subdirectory that contains all the necessary HTML and GIF files that make up the book. Ensure that the directory structure remains the same.
2. Configure the Web server to look for the files in the new location. For information, refer to the NetQuestion Appendix in the *Installation and Configuration Supplement*.
3. If you are using the Java version of the Information Center, you can specify a base URL for all HTML files. You should use the URL for the list of books.
4. When you are able to view the book files, you can bookmark commonly viewed topics. You will probably want to bookmark the following pages:
 - List of books
 - Tables of contents of frequently used books
 - Frequently referenced articles, such as the ALTER TABLE topic
 - The Search form

For information about how you can serve the DB2 Universal Database online documentation files from a central machine, refer to the NetQuestion Appendix in the *Installation and Configuration Supplement*.

Searching Information Online

To find information in the HTML files, use one of the following methods:

- Click **Search** in the top frame. Use the search form to find a specific topic. This function is not available in the Linux, PTX, or Silicon Graphics IRIX environments.
- Click **Index** in the top frame. Use the index to find a specific topic in the book.
- Display the table of contents or index of the help or the HTML book, and then use the find function of the Web browser to find a specific topic in the book.

- Use the bookmark function of the Web browser to quickly return to a specific topic.
- Use the search function of the Information Center to find specific topics. See “Accessing Information with the Information Center” on page 105 for details.

Appendix C. Notices

IBM may not offer the products, services, or features discussed in this document in all countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation
Licensing
2-31 Roppongi 3-chome, Minato-ku
Tokyo 106, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:
INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make

improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Canada Limited
Office of the Lab Director
1150 Eglinton Ave. East
North York, Ontario
M3C 1H7
CANADA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information may contain examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information may contain sample application programs in source language, which illustrates programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs.

Each copy or any portion of these sample programs or any derivative work must include a copyright notice as follows:

© (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. _enter the year or years_. All rights reserved.

Trademarks

The following terms, which may be denoted by an asterisk(*), are trademarks of International Business Machines Corporation in the United States, other countries, or both.

ACF/VTAM	IBM
AISPO	IMS
AIX	IMS/ESA
AIX/6000	LAN DistanceMVS
AIXwindows	MVS/ESA
AnyNet	MVS/XA
APPN	Net.Data
AS/400	OS/2
BookManager	OS/390
CICS	OS/400
C Set++	PowerPC
C/370	QBIC
DATABASE 2	QMF
DataHub	RACF
DataJoiner	RISC System/6000
DataPropagator	RS/6000
DataRefresher	S/370
DB2	SP
DB2 Connect	SQL/DS
DB2 Extenders	SQL/400
DB2 OLAP Server	System/370
DB2 Universal Database	System/390
Distributed Relational Database Architecture	SystemView
DRDA	VisualAge
eNetwork	VM/ESA
Extended Services	VSE/ESA
FFST	VTAM
First Failure Support Technology	WebExplorer
	WIN-OS/2

The following terms are trademarks or registered trademarks of other companies:

Microsoft, Windows, and Windows NT are trademarks or registered trademarks of Microsoft Corporation.

Java or all Java-based trademarks and logos, and Solaris are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Tivoli and NetView are trademarks of Tivoli Systems Inc. in the United States, other countries, or both.

UNIX is a registered trademark in the United States, other countries or both and is licensed exclusively through X/Open Company Limited.

Other company, product, or service names, which may be denoted by a double asterisk(**) may be trademarks or service marks of others.

Index

A

ADD CONSTRAINT statement 53
add database wizard 107, 108
Administration Guide v
ALL, using in a query 50
ALTER TABLE statement 53
ANY keyword 50
Application Development Guide v
arithmetic operators 25
AS clause 25
authorization ID 4

B

backup database wizard 107
base table 3
BETWEEN predicate 48
BIGINT, data type 5
binary integer, description 5
BLOB data type 67
BLOB string 67
books 91, 101

C

case expression
description 34
SIGN function 34
casting data types
description 33
CHAR, data type 5
character string
as data type 5
fixed length 5
varying length 5
CL_SCHED sample table 72
CLOB data type 67
CLOB string 67
column
ASC, ascending order sort 23
definition of 3
DESC, descending order sort 23
column function 28
AVG 28
COUNT 28
MAX 28
MIN 28
column functions 28
combining, queries 45
command line processor 1
common table expression
description 36

comparison operator used in a
subquery 50
composite key 51
configure multisite update
wizard 107
CONNECT statement 18
explicit 18
implicit 18
connecting queries 47
constraints
referential constraints 9
unique constraints 9
correlated reference, description 39
correlated subquery
description 39
when to use 41
correlation
description 38
name 40
subqueries using joins 42
subquery 39
correlation-name
qualified reference of column
name 38
rules for 38
create database wizard 107
CREATE DISTINCT TYPE 65
CREATE FUNCTION 66
create table space wizard 107
CREATE TABLE statement 9
NOT NULL/NOT NULL WITH
DEFAULT value for column 9
create table wizard 107
CREATE TRIGGER 54
CREATE VIEW statement 13
WITH CHECK OPTION 13
creating the sample database 72
cross product 58
cross-tabulation rows 62
CUBE 62
cross-tabulation rows 62
sub-total rows 62
CURRENT DATE special
register 68
CURRENT FUNCTION PATH
special register 68
CURRENT SERVER special
register 68
CURRENT TIME special register 68

CURRENT TIMESTAMP special
register 68
CURRENT TIMEZONE special
register 68

D

data conversion
join conditions 60
set operators 47
data structure
column 3
row 3
value 3
data type
distinct 65
data types
BIGINT 5
CHAR 5
DATE 5
DATETIME 5
DECIMAL 5
DOUBLE 5
FLOAT 5
INTEGER 5
REAL 5
SMALLINT 5
TIME 5
TIMESTAMP 5
VARCHAR 5
database manager 1
DATE, data type 5
DATETIME, data type 5
datetime values, description 5
DB2 library
books 91
Information Center 105
language identifier for books 99
late-breaking information 100
online help 102
ordering printed books 101
printing PDF books 100
searching online
information 108
setting up document server 108
structure of 91
viewing online information 104
wizards 107
DBLOB data type 67
DBLOB string 67
DECIMAL, data type 5

decimal, description 5
DELETE statement 12
DEPARTMENT sample table 73
distinct data type 65
DISTINCT keyword 24, 29
DOUBLE, data type 5

E

EMP_ACT sample table 76
EMP_PHOTO sample table 78
EMP_RESUME sample table 78
EMPLOYEE sample table 73
erasing the sample database 72
error messages
 message identifier 18
 SQLSCODE 18
 SQLSTATE 18
EXCEPT ALL 46
EXCEPT operator 46
 ordering results 47
 usage restrictions involving 47
 data types 47
EXISTS predicate 49
expressions 25
expressions, naming 25
external scalar function 66
external table function 66

F

FLOAT, data type 5
foreign key 52
FROM clause 19
FULL OUTER join 58
fullselect 33
 ALL keyword 50
 ANY keyword 50
 subquery 10, 50
 with INSERT statement 10
fullselect, definition 10
function
 built-in 28
 column 28
 description 28
 online analytical processing
 (OLAP) 63
 scalar 28
 table 30
 user-defined 28

G

graphic string
 fixed length 5
 varying length 5
GROUP BY 24
GROUP BY clause
 grouping column 30

GROUP BY clause (*continued*)
 with HAVING clause 32
grouping column, definition 30

H

HAVING 24
HAVING clause
 description 32
HTML
 sample programs 99

I

IN predicate 48
IN_TRAY sample table 79
index wizard 107
Information Center 105
inner join 58
INSERT statement 10
 NOT NULL/NOT NULL WITH
 DEFAULT value for
 column 10
installing
 Netscape browser 105
INTEGER, data type 5
interactive SQL, definition 1
INTERSECT ALL 47
INTERSECT operator 47
 ordering results 47
 usage restrictions involving 47
 data types 47

J

join
 correlated subqueries 42
 cross product 58
 data conversion 60
 definition 26
 join conditions 58
 without join conditions 58
join condition 58

K

key
 composite 51
 definition 51
 foreign 52
 primary 52
 unique 52

L

language identifier
 books 99
large object location, definition 67
late-breaking information 100
LEFT OUTER join 58
LIKE predicate 49

LOB
 locator, definition 67
 string, definition 67
locator 67

M

merging results of queries 45
modifying tables through a view 15
 WITH CHECK OPTION 15
multiple node relational database,
 definition 1

N

nested table expressions,
 description 36
nesting correlated subqueries 42
Netscape browser
 installing 105
NOT BETWEEN predicate 48
NOT EXISTS predicate 49
NOT IN predicate 48
NOT LIKE predicate 49
null value 45
 delete column value 12
null value, description 5
numbers, description 5

O

OLAP functions 63
 aggregate group 63
 ordering rows in 63
 partitioning rows in 63
OLE DB external table function 66
online analytical processing 63
online help 102
online information
 searching 108
 viewing 104
ORDER BY clause 22
 set operators 47
order of operations 24, 28
ORG sample table 79
outer join
 description 58
 FULL OUTER join 58
 LEFT OUTER join 58
 RIGHT OUTER join 58
outer-level predicate 50
outer-level query, correlation 41

P

parent key, definition 52
partitioned relational database,
 definition 1
PDF 100
performance configuration
 wizard 107

precision, as a numeric attribute 5
predicate
 IS NOT NULL 20
 IS NULL 20
primary key 52
printing PDF books 100
PROJECT sample table 80

Q

qualifying objects 4, 17
queries, connecting 47
Quick Beginnings v

R

REAL, data type 5
recursive queries, description 63
referential integrity constraints
 definition 51
 description 52
 foreign key 52
 parent key 52
Related Documentation v
relational database, definition 1
relationship between tables and
 views 13
release notes 100
removing duplicate rows 24
reserved schemas 4
restore wizard 107
restrictions
 for set operators 47
result table 3
retrieving data 19
RIGHT OUTER join 58
ROLL-UP
 sub-total rows 62
ROLLUP 62
row
 definition of 3
 selecting 20

S

SALES sample table 81
sample database
 creating 72
 erasing 72
Sample Database 71
sample programs
 cross-platform 99
 HTML 99
sample tables 71, 91
scalar fullselects
 description 33
scalar function 28
 DECIMAL 36

Scalar function
 ABS 29
 HEX 29
 LENGTH 29
 SIGN 29
 YEAR 29
schema
 definition of 4
search condition 20
searching
 online information 106, 108
select list 19
SELECT statement 19
SET clause
 with UPDATE statement 12
SET CONSTRAINTS statement 53
setting up document server 108
sign, as a numeric attribute 5
SMALLINT, data type 5
SmartGuides
 wizards 107
SOME keyword 50
sorting rows 22
sourced function 66
special register 68
 CURRENT DATE 68
 CURRENT DEGREE 68
 CURRENT FUNCTION
 PATH 68
 CURRENT PATH 68
 CURRENT SERVER 68
 CURRENT TIME 68
 CURRENT TIMESTAMP 68
 CURRENT TIMEZONE 68
 USER 68

SQL procedure language v
SQL Reference v
STAFF sample table 82
STAFFG sample table 83
string
 LOB 67
Structured Query Language (SQL),
 definition 1
sub-total rows 62
subquery
 definition 27
system catalogs 69

T

table
 base table 3
 combine data (join) 26
 definition of 3
 foreign key 52
 functions 30
 primary key 52

table (*continued*)
 qualifying a column name 38
 result table 3
 Sample Database 71
 unique constraint 52
 unique key 52
table check constraints
 deferred constraint checking 53
 definition 51
 description 53
table expressions
 description 35
table function
 SQLCACHE_SNAPSHOT 30
testing, existence 49
testing for existence 49
TIME, data type 5
TIMESTAMP, data type 5
triggers
 after trigger 54
 before trigger 54
 CREATE TRIGGER 54
 definition 51
 description 54
 transition variables 56

U

UNION ALL 45
UNION operator 45, 46
 description 45
 ordering results 46
 usage restrictions involving 47
 data types 47
unique constraint 52
unique constraints
 definition 51
unique key 52
 unique constraint 52
UPDATE statement 12
user-defined functions 66
 defining 66
 external scalar function 66
 external table function 66
 OLE DB external table
 function 66
 sourced function 66
USER special register 68

V

value
 definition of 3
value in SQL 5
VALUES clause
 with INSERT statement 10
VARCHAR, data type 5

- view
 - qualifying a column name 38
- View
 - advantages 4
 - description 4
- viewing
 - online information 104

W

- WHERE clause 20
 - combine table data (join) in SELECT statement 26
 - grouping considerations 31
- WITH CHECK OPTION 15
- WITH clause 36
- wizards
 - add database 107, 108
 - backup database 107
 - completing tasks 107
 - configure multisite update 107
 - create database 107
 - create table 107
 - create table space 107
 - index 107
 - performance configuration 107
 - restore database 107

Contacting IBM

If you have a technical problem, please review and carry out the actions suggested by the *Troubleshooting Guide* before contacting DB2 Customer Support. This guide suggests information that you can gather to help DB2 Customer Support to serve you better.

For information or to order any of the DB2 Universal Database products contact an IBM representative at a local branch office or contact any authorized IBM software remarketer.

If you live in the U.S.A., then you can call one of the following numbers:

- 1-800-237-5511 for customer support
- 1-888-426-4343 to learn about available service options

Product Information

If you live in the U.S.A., then you can call one of the following numbers:

- 1-800-IBM-CALL (1-800-426-2255) or 1-800-3IBM-OS2 (1-800-342-6672) to order products or get general information.
- 1-800-879-2755 to order publications.

<http://www.ibm.com/software/data/>

The DB2 World Wide Web pages provide current DB2 information about news, product descriptions, education schedules, and more.

<http://www.ibm.com/software/data/db2/library/>

The DB2 Product and Service Technical Library provides access to frequently asked questions, fixes, books, and up-to-date DB2 technical information.

Note: This information may be in English only.

<http://www.elink.ibm.com/pbl/pbl/>

The International Publications ordering Web site provides information on how to order books.

<http://www.ibm.com/education/certify/>

The Professional Certification Program from the IBM Web site provides certification test information for a variety of IBM products, including DB2.

ftp.software.ibm.com

Log on as anonymous. In the directory /ps/products/db2, you can find demos, fixes, information, and tools relating to DB2 and many other products.

comp.databases.ibm-db2, bit.listserv.db2-l

These Internet newsgroups are available for users to discuss their experiences with DB2 products.

On CompuServe: GO IBMDB2

Enter this command to access the IBM DB2 Family forums. All DB2 products are supported through these forums.

For information on how to contact IBM outside of the United States, refer to Appendix A of the **IBM Software Support Handbook**. To access this document, go to the following Web page: <http://www.ibm.com/support/>, and then select the IBM Software Support Handbook link near the bottom of the page.

Note: In some countries, IBM-authorized dealers should contact their dealer support structure instead of the IBM Support Center.



Part Number: CT7YHNA



Printed in the United States of America
on recycled paper containing 10%
recovered post-consumer fiber.

SC09-2973-00



CT7YHNA

